

ISO/TC 107

Secretariat: KATS

Voting begins on:
2015-10-22

Voting terminates on:
2015-12-22

Vitreous and porcelain enamels — Glass-lined apparatus for process plants —

Part 5: Presentation and characterisation of defects

*Emaux vitrifiés — Appareils émaillés pour les installations
industrielles —*

*Partie 5: Présentation et
caractérisation des défauts*

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

Please see the administrative notes on page iii



Reference number
ISO/FDIS 28721-5:2015(E)

ISO/CEN PARALLEL PROCESSING

This final draft has been developed within the European Committee for Standardization (CEN), and processed under the **CEN-lead** mode of collaboration as defined in the Vienna Agreement. The final draft was established on the basis of comments received during a parallel enquiry on the draft.

This final draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel two-month approval vote in ISO and two month formal vote in CEN.

Positive votes shall not be accompanied by comments.

Negative votes shall be accompanied by the relevant technical reasons.

iTeh STANDARD PREVIEW
(standards.itih.ai)
Full standard:
<https://standards.itih.ai/catalog/standards/sist/2e4d2be2-0771-4cc9-9f61-bbe1854cbe80/iso-28721-5-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Enamelling defects	2
4.1 Colour lines.....	2
4.1.1 General.....	2
4.1.2 Strain lines.....	2
4.1.3 Tearings.....	3
4.1.4 Pearl lines.....	4
4.1.5 Shore lines.....	4
4.1.6 Drying cracks.....	5
4.2 Boiling defect.....	6
4.2.1 Further designations.....	6
4.2.2 Description.....	6
4.2.3 Origin and causes.....	7
4.2.4 Classification.....	7
4.2.5 Suggestions for defect treatment.....	7
4.3 Rough enamel surface.....	7
4.3.1 Underfired areas.....	7
4.3.2 Eggshell.....	8
4.4 Dimple.....	9
4.4.1 Further designations.....	9
4.4.2 Description.....	10
4.4.3 Origin and causes.....	10
4.4.4 Classification.....	10
4.4.5 Suggestions for defect treatment.....	10
4.5 Pinholes.....	10
4.5.1 Further designations.....	10
4.5.2 Description.....	10
4.5.3 Origin and causes.....	11
4.5.4 Classification.....	11
4.5.5 Suggestions for defect treatment.....	11
4.6 Contamination.....	11
4.6.1 Chamotte/refractory clay.....	11
4.6.2 Scale.....	12
4.6.3 Ceramic fibres.....	13
4.7 Colour deviations.....	14
4.7.1 Water marks.....	14
4.7.2 Colour stains.....	15
5 Repaired areas	16
5.1 Polished area.....	16
5.1.1 Further designations.....	16
5.1.2 Description.....	16
5.1.3 Origin and causes.....	17
5.1.4 Classification.....	17
5.1.5 Suggestions for defect treatment.....	17
5.2 Enamel-covered area after grinding.....	17
5.2.1 Further designations.....	17
5.2.2 Description.....	17
5.2.3 Origin and causes.....	18
5.2.4 Classification.....	18
5.2.5 Suggestions for defect treatment.....	18

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 107, *Metallic and other inorganic coatings*, and in collaboration with Technical Committee CEN/TC 262, *Metallic and other inorganic coatings*.

ISO 28721 consists of the following parts, under the general title *Vitreous and porcelain enamels — Glass-lined apparatus for process plants*:

- *Part 1: Quality requirements for apparatus, components, appliances and accessories*
- *Part 2: Designation and specification of resistance to chemical attack and thermal shock*
- *Part 3: Thermal shock resistance*
- *Part 4: Quality requirements for glass-lined flanged steel pipes and flanged steel fittings*
- *Part 5: Presentation and characterisation of defects*

Vitreous and porcelain enamels — Glass-lined apparatus for process plants —

Part 5: Presentation and characterisation of defects

1 Scope

This part of ISO 28721 establishes a system for the cataloguing of defects in enamellings for chemical service and vessels. In addition, it describes some types of areas in which defects have been treated and which can easily be confounded with enamelling defects. It serves for a consistent language use concerning the designation and characterization of enamelling defects.

This part of ISO 28721 is limited to detectable defects and does not purport to fully take into consideration all occurring types of defects. It does **not** evaluate enamelling defects; the classification carried out is based on experience and corresponds, as far as possible, to ISO 28721-1.

NOTE Regarding the acceptance of glass lined equipment for use in process engineering, ISO 28721-1 applies.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 28721-1, *Vitreous and porcelain enamels — Glass-lined apparatus for process plants — Part 1: Quality requirements for apparatus, components, appliances and accessories*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

enamelling defect

defect arising during the enamelling of equipment and pipelines to be used in process engineering

3.2

reparable enamelling defect

enamelling defect that can be remedied without thermal post-treatment

EXAMPLE Defect that can be remedied by polishing.

3.3

non-reparable enamelling defect

defect in the enamel coating that renders a component unfit for its respective intended use

3.4

refiring

further enamel firing (also local), with or without another application

3.5

re-enamelling

complete new creation of the enamel coating

4 Enamelling defects

4.1 Colour lines

4.1.1 General

The enamelling defects strain lines (4.1.2), tearings (4.1.3) and pearl lines (4.1.4) are closely related to one another. The causes of their development and their appearances are similar.

4.1.2 Strain lines

4.1.2.1 Further designations

Merged strain lines, linearly upward fused ground coat and hairlines.

4.1.2.2 Description

Strain lines are lines that are always dark and running parallel, or concentrically in the usually blue or white glass cover coat (see Figure 1). In a severe case of strain lines, a number of bubbles or blisters in a single line can appear, forming a pearl line (4.1.4).



a) White cover coat with macroscopically detectable strain lines

b) Lateral view, white cover coat exploring leapt up dark ground coat

Figure 1 — Strain lines

4.1.2.3 Origin and causes

Strain lines arise during enamelling due to thermally or mechanically induced stress in the component. When heating up, the ground coat and the covering bisque cracks open. During firing, parts of the ground coat penetrate into the cover coat.

Possible causes are the following:

- a wrong combination of steel/ground coat/cover coat;
- weld seam made from non-suitable filler material;
- mixing zones in the weld metal;
- non-adapted temperature control during enamelling of constructively unfavourable components, e.g. components showing mass accumulation;
- plastic deformation of the component during enamelling.

4.1.2.4 Classification

Non-reparable enamelling defect.

4.1.2.5 Suggestions for defect treatment

Re-enamelling, taking into consideration the causes mentioned in [4.1.2.3](#).

4.1.3 Tearings

4.1.3.1 Further designations

Hairlines.

4.1.3.2 Description

Tearings are mostly dark lines, running parallel or concentrically in the cover coat, i.e. lines that are always dark in blue enamel and either dark or light and transparent in white enamel. In contradiction to pearl lines (see [4.1.4](#)), the lines do not show large blisters and are closely related to strain lines (see [4.1.2](#)). Unlike strain lines, however, these lines are recessed (see [Figure 2](#)).



Figure 2 — Tearings

4.1.3.3 Origin and causes

Tearings arise during enamelling due to thermally or mechanically induced stress in the component. When heating up, the enamel bisque and/or the enamel coating crack(s) open. These cracks merge again during firing. If only the cover coat is affected, dark lines appear. If the crack runs through to the metal surface, blisters in the form of pearl lines also (see [4.1.4](#)) arise along the crack (for causes, see [4.1.2.3](#)).

4.1.3.4 Classification

Non-reparable enamelling defect. As, without carrying out destructive testing, it cannot be determined whether parts of the ground coat leap up, toleration is generally not possible for safety reasons.

4.1.3.5 Suggestions for defect treatment

Re-enamelling, taking into consideration the causes mentioned in [4.1.3.3](#).

4.1.4 Pearl lines

4.1.4.1 Further designations

Bubble lines and blister lines.

4.1.4.2 Description

Pearl lines are blisters lying behind each other in a line, often combined with strain lines (see [4.1.1](#)) or tearings (see [4.1.2](#) and [Figure 3](#)).

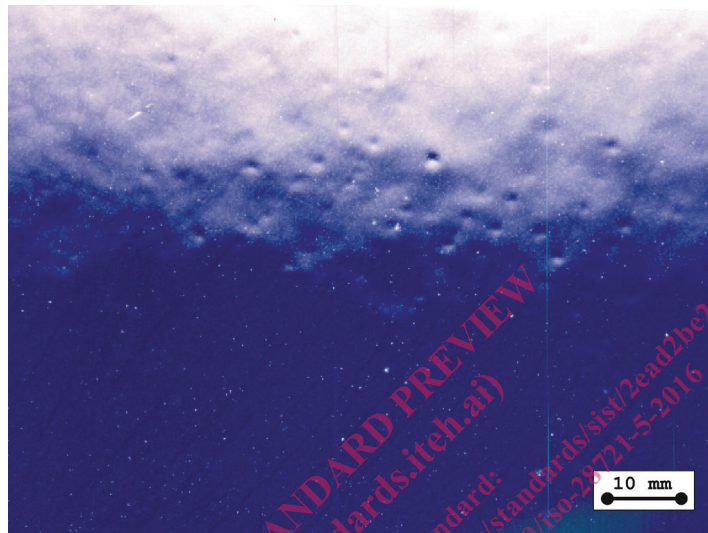


Figure 3 — Pearl lines, i.e. series of blisters in line, in zones showing strain lines (see [4.1.2](#))

4.1.4.3 Origin and causes

Pearl lines arise during enamelling due to thermally or mechanically induced restraints in the component. When heating up, the enamel bisque and the enamel coating crack open through to the steel. During firing, the metal oxidizes, a process accompanied by gas-forming reactions in the boundary layer. The lines run to form strain lines (see [4.1.2](#)), along which blisters and pores are positioned as if on a string of beads (for causes, see [4.1.2.3](#)).

4.1.4.4 Classification

Non-reparable defect.

4.1.4.5 Suggestions for defect treatment

Re-enamelling, taking into consideration the causes mentioned in [4.1.4.3](#).

4.1.5 Shore lines

4.1.5.1 Further designations

None.

4.1.5.2 Description

Shore lines are a group of parallel or nearly parallel lines appearing as a deviation in colour (darker in blue enamel and more transparent in white enamel). These lines, that are usually a few millimetres wide and at least one centimetre long, can be positioned anywhere on the enamel surface (see [Figure 4](#)).

Shore lines are usually wider than strain lines (see [4.1.2](#)), due to a greater width and irregular edges in the longitudinal direction.



Figure 4 — Dark blue shore lines on a blue enamel surface

4.1.5.3 Origin and causes

Following the drying of the bisque, the smaller enamel particles concentrate on the surface and form a thin and lighter-coloured upper layer following enamelling. Therefore, the defects of this layer appear darker. In order to remove dust before firing, the enamel bisque is cleaned by means of a hand broom. If, in doing so, the surface of the bisque is slightly damaged, these scratch marks appear as dark lines following firing.

4.1.5.4 Classification

Shore lines are a colour defect and affect neither the resistance nor the mechanical strength negatively.

4.1.5.5 Suggestions for defect treatment

Not necessary.

4.1.6 Drying cracks

4.1.6.1 Further designations

Crocodiling.

4.1.6.2 Description

Drying cracks are wide and often netlike lines in the enamel, that are in most cases slightly recessed. Typical of these defects is the irregular, wound course of the lines. In the line itself, usually no blisters appear in the enamel. In the areas of mass accumulations of the steel, the lines can also be arranged

orderly, similar to strain lines (see 4.1.2). The overall irregular course, however, stays unchanged. The enamel coating under drying cracks is usually free of defects (see Figure 5).

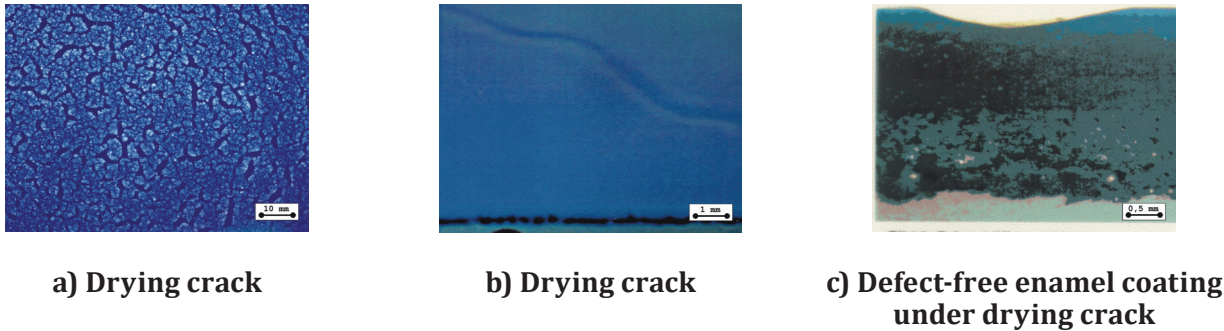


Figure 5 — Drying cracks of different distinctness, as well as with underlying defect-free enamel coating

4.1.6.3 Origin and causes

As a result of cracks in the enamel bisque, in the respective areas the enamel cannot merge to form a homogeneous coating during firing. The underlying enamel layer, that is mostly darker, becomes visible. Due to the contraction of the liquid enamel, the edges are in most cases slightly raised and have a higher proportion of fine blisters, visible in the form of a lighter colour. Unlike strain lines (see 4.1.2), drying cracks are not caused by construction. There are three major causes for the origin of these lines:

- knocking of the coated component before firing;
- firing of a incompletely dried bisque;
- unfavourable bisque structure of the applied enamel slip layer, due to application mistakes;
- intensive mechanical damage to the bisque.

4.1.6.4 Classification

Drying cracks are classified by their degree of distinctness. If they are only slightly distinct, they are surface features which affect neither the chemical resistance nor the mechanical strength: at the deepest points of the line, the agreed minimum coating thickness is maintained, and there are no large blisters to be seen at the edges of the lines. The defect may be kept unremedied. In the case of more distinct defects, those which extend over large areas, blisters in the edges or an intensive brightening of the enamel, the defect is a non-reparable enamelling defect.

4.1.6.5 Suggestions for defect treatment

In the case of distinct defects, repair by grinding and subsequent refiring.

4.2 Boiling defect

4.2.1 Further designations

Full penetration of the ground coat.

4.2.2 Description

A boiling defect is a dark, greenish spot on the surface of the enamel, possibly combined with a small depression (see Figure 6).