# INTERNATIONAL STANDARD

ISO 5610-15

Second edition 2014-09-01

## Tool holders with rectangular shank for indexable inserts —

Part 15: **Style V** 

Porte-plaquette à queue rectangulaire pour plaquettes amovibles —

iTeh STPATE 15: FORMEY PREVIEW (standards.iteh.ai)



ISO 5610-15:2014 https://standards.iteh.ai/catalog/standards/sist/b5dfb2cf-c697-4179-8774-9d699609bc11/iso-5610-15-2014



#### COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Co	ontents	Page
Fore	reword	iv
1	Scope	1
2	Normative references	1
3	Dimensions 3.1 General 3.2 Tool holder style V for rhombic indexable insert shape V	1
4	Designation	3
5	Material	3
6	Design $6.1$ Type of mounting $6.2$ Corner radius, $r_{\epsilon}$ $6.3$ Thickness $\boldsymbol{s}$ of indexable insert	3 3 4 4
7	Extent of delivery	4
8	Marking	4
Rihl	nliography	5

### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with defined cutting edges, cutting items*.

ISO 5610-15:2014

This second edition cancels and replaces the first/edition (ISO55610-15:2010), of which it constitutes a minor revision. 9d699609bc11/iso-5610-15-2014

ISO 5610 consists of the following parts, under the general title *Tool holders with rectangular shank for indexable inserts*:

- Part 1: General survey, correlation and determination of dimensions
- Part 2: Style A
- Part 3: Style B
- Part 4: Style D
- Part 5: Style F
- Part 6: Style G
- Part 7: Style J
- Part 8: Style K
- Part 9: Style L
- Part 10: Style N
- Part 11: Style R
- Part 12: Style S
- Part 13: Style T

- Part 14: Style H
- Part 15: Style V

## Tool holders with rectangular shank for indexable inserts —

# Part 15: **Style V**

### 1 Scope

This part of ISO 5610 specifies tool holders with rectangular shank, style V, i.e. with straight shank and cutting edge angle  $\kappa_r = 72,5^{\circ}$  for side cutting.

These tool holders are primarily intended for indexable inserts made of hard metal or other cutting materials to be mounted by clamping and to be used for turning operations.

NOTE The symbols for the dimensions shown in the tables of this part of ISO 5610 and the corresponding preferred symbols of properties defined in ISO/TS 13399-2 and ISO/TS 13399-3 are given in ISO 5610-1:2014, Table A.1.

### 2 Normative references TANDARD PREVIEW

The following documents, in whole or in part are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5608:2012, Turning and copying toot holders and cartridges for indexable inserts — Designation

ISO 5610-1:2014, Tool holders with rectangular shank for indexable inserts — Part 1: General survey, correlation and determination of dimensions

#### 3 Dimensions

#### 3.1 General


It is not necessary for tool holders to comply with the pictorial representation; only the dimensions given shall be observed.

For determination of dimensions  $h_1$ ,  $f_2$  and  $l_1$ , see ISO 5610-1.

For explanation of the designation code for tool holders, see ISO 5608.

NOTE The values of rake angles and inclination angles shown in the figures are recommended values; they can vary according to the application.

## ${\bf 3.2}\quad Tool\ holder\ style\ V\ for\ rhombic\ indexable\ insert\ shape\ V$

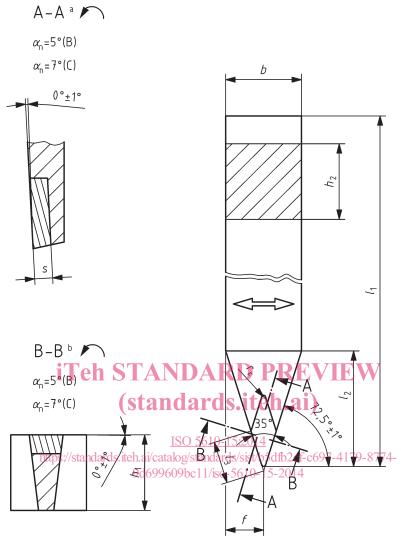

#### Key

- a Inclination angle,  $\lambda_s$ .
- b Rake angle,  $\gamma_0$ .

Figure 1 — Tool holder style V for rhombic indexable insert — V

Table 1

Dimensions in millimetres

Symbola	h <sub>1</sub> is13	<i>b</i> h13	<i>l</i> <sub>3</sub> ≈	f ±0,25	h <sub>2</sub>	l <sub>1</sub> a k16	l <sub>2</sub> max.	Sp
SVVBN 1212 — 11	12	12	11,1	6	12	_	25	2.40
SVVBN 1616 — 11	16	16	11,1	8	16	_	25	3,18
SVVBN 2020 — 16	20	20	16,6	10	20	_	40	4,76

For the selection of length,  $l_1$ , the dash can be replaced by the dimensions of ISO 5610-1:2014, Table 2. For letter symbols identifying the tool length, see ISO 5608:2012, Table 6.

Insert thickness without shim, if applicable.

Table 1

Symbol <sup>a</sup>	$h_1$	b	l <sub>3</sub>	f	h <sub>2</sub>	l <sub>1</sub> a	l <sub>2</sub>	<i>s</i> b
	js13	h13	≈	±0,25	h13	k16	max.	
SVVBN 2525 — 16	25	25	16,6	12,5	25	_	40	4,76
SVVBN 3225 — 16	32	25	16,6	12,5	32	_	40	4,76

For the selection of length,  $l_1$ , the dash can be replaced by the dimensions of ISO 5610-1:2014, Table 2. For letter symbols identifying the tool length, see ISO 5608:2012, Table 6.

### 4 Designation

A tool holder in accordance with this part of ISO 5610 shall be designated by the following:

- a) "Tool holder";
- b) a reference to this part of ISO 5610 (i.e. ISO 5610-15);
- c) type of mounting, in accordance with ISO 5608;
- d) symbol for indexable insert shape, in accordance with ISO 5608;
- e) symbol for tool style, in accordance with ISO 5608;
- f) symbol for the indexable insert normal clearance, in accordance with ISO 5608;
- g) symbol for hand of tool, in accordance with 150 5608, ai)
- h) its height,  $h_1$ , width, b, and length,  $l_1$  (symbol for tool length in accordance with ISO 5608);
- i) its cutting edge length, 13. 9d699609bc11/iso-5610-15-2014

EXAMPLE Tool holder for a screw-clamped (S) rhombic indexable insert shape V (V), tool holder style V (V), for normal clearance of indexable insert  $\alpha_n = 5^{\circ}$  (B), left- and right-hand cutting (N), with height  $h_1 = 20$  mm and width b = 20 mm (2020), length  $l_1 = 125$  mm (K), for cutting edge length  $l_3 = 11,1$  mm (11) is designated as follows:

#### Tool holder ISO 5610-15 - SVVBN 2020 K11

#### 5 Material

The material should be steel with a tensile strength of at least 1 200 N/mm<sup>2</sup>.

### 6 Design

#### 6.1 Type of mounting

Standard design of tool holders with indexable insert shall be mounted in accordance with Table 1.

Other types of mounting are at the manufacturer's discretion or upon agreement. The letter symbol in the designation, symbol 1, shall then be replaced by the respective symbol for the chosen or agreed-upon type of mounting in accordance with ISO 5608.

For the modified type of mounting deviating from <u>Table 1</u>, the relevant indexable insert thickness shall also be considered.

Insert thickness without shim, if applicable.