



Standard Guide for Statistical Procedures to Use in Developing and Applying Test Methods¹

This standard is issued under the fixed designation E1488; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This guide identifies statistical procedures for use in developing new test methods or revising or evaluating existing test methods, or both.

1.2 This guide also cites statistical procedures especially useful in the application of test methods.

2. Referenced Documents

2.1 ASTM Standards:²

E177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods

E178 Practice for Dealing With Outlying Observations

E456 Terminology Relating to Quality and Statistics

E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

E1169 Practice for Conducting Ruggedness Tests

E2282 Guide for Defining the Test Result of a Test Method

E2489 Practice for Statistical Analysis of One-Sample and Two-Sample Interlaboratory Proficiency Testing Programs

E2554 Practice for Estimating and Monitoring the Uncertainty of Test Results of a Test Method in a Single Laboratory Using a Control Sample Program

E2586 Practice for Calculating and Using Basic Statistics

E2587 Practice for Use of Control Charts in Statistical Process Control

2.2 ISO Standards:

ISO 17025 General Requirements for the Competence of Testing and Calibration Laboratories³

ISO Guide to the Expression of Uncertainty in Measurement³

¹ This guide is under the jurisdiction of ASTM Committee E11 on Quality and Statistics and is the direct responsibility of Subcommittee E11.20 on Test Method Evaluation and Quality Control.

Current edition approved May 15, 2009. Published July 2009. Originally approved in 1992. Last previous edition approved in 2008 as E1488 – 08a. DOI: 10.1520/E1488-09.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, http://www.ansi.org.

3. Terminology

3.1 Definitions:

3.1.1 *bias, n*—the difference between the expectation of the test results and an accepted reference value. **E177**

3.1.1.1 *Discussion*—Statistical procedures include the sampling considerations or the experiment design for the collection of data, or both, and the numerical and graphical approaches to summarize and analyze the collected data.

3.1.2 *coefficient of variation, CV, n*—for a nonnegative characteristic, the ratio of the standard deviation to the mean for a population or sample. **E2586**

3.1.3 *component of variance, n*—a part of a total variance identified with a specified source of variability.

3.1.4 *control chart, n*—chart on which are plotted a statistical measure of a subgroup versus time of sampling along with limits based on the statistical distribution of that measure so as to indicate how much common, or chance, cause variation is inherent in the process or product. **E2587**

3.1.5 *observation, n*—the process of obtaining information regarding the presence or absence of an attribute of a test specimen, or of making a reading on a characteristic or dimension of a test specimen. **E2282**

3.1.6 *observed value, n*—the value obtained by making an observation. **E2282**

3.1.7 *precision, n*—the closeness of agreement between independent test results obtained under stipulated conditions. **E177**

3.1.8 *proficiency testing, n*—determination of laboratory testing performance by means of interlaboratory comparisons. **E2489**

3.1.9 *repeatability, n*—precision under repeatability conditions. **E177**

3.1.10 *repeatability conditions, n*—conditions where independent test results are obtained with the same method on identical test items in the same laboratory by the same operator using the same equipment within short intervals of time. **E177**

3.1.11 *repeatability limit r, n*—the value below which the absolute difference between two individual test results obtained

under repeatability conditions may be expected to occur with a probability of approximately 0.95 (95 %). **E177**

3.1.12 *repeatability standard deviation, n*—the standard deviation of test results obtained under repeatability conditions. **E177**

3.1.13 *reproducibility, n*—precision under reproducibility conditions. **E177**

3.1.14 *reproducibility conditions, n*—conditions where test results are obtained with the same method on identical test items in different laboratories with different operators using different equipment. **E177**

3.1.15 *reproducibility limit, R, n*—the value below which the absolute difference between two test results obtained under reproducibility conditions may be expected to occur with a probability of approximately 0.95 (95 %). **E177**

3.1.16 *reproducibility standard deviation S R, n*—the standard deviation of test results obtained under reproducibility conditions. **E177**

3.1.17 *ruggedness, n*—insensitivity of a test method to departures from specified test or environmental conditions. **E1169**

3.1.18 *ruggedness test, n*—a planned experiment in which environmental factors or test conditions are deliberately varied in order to evaluate the effects of such variation. **E1169**

3.1.19 *standard deviation, n—of a population, σ* , the square root of the average or expected value of the squared deviation of a variable from its mean — *of a sample \bar{x}* , the square root of the sum of the squared deviations of the observed values in the sample divided by the sample size minus 1. **E2586**

3.1.20 *state of statistical control, n*—process condition when only common causes are operating on the process. **E2587**

3.1.21 *statistical procedures, n*—the organized techniques and methods used to collect, analyze, and interpret data.

3.1.21.1 *Discussion*—Statistical procedures include the sampling considerations or the experiment design for the collection of data, or both, and the numerical and graphical approaches to summarize and analyze the collected data.

3.1.22 *test determination, n*—the value of a characteristic or dimension of a single test specimen derived from one or more observed values. **E2282**

3.1.23 *test method, n*—a definitive procedure that produces a test result. **E2282**

3.1.24 *test observation, n*—see **observation**. **E2282**

3.1.25 *test result, n*—the value of a characteristic obtained by carrying out a specified test method. **E2282**

3.1.25.1 *Discussion*—Statistical procedures include the sampling considerations or the experiment design for the collection of data, or both, and the numerical and graphical approaches to summarize and analyze the collected data.

3.2 For all other formal definitions of statistical terms, see Terminology **E456**.

4. Significance and Use

4.1 All ASTM test methods are required to include statements on precision and bias.⁴

4.2 Since ASTM began to require all test methods to have precision and bias statements that are based on interlaboratory test methods, there has been increased concern regarding what statistical experiments and procedures to use during the development of the test methods. Although there exists a wide range of statistical procedures, there is a small group of generally accepted techniques that are very beneficial to follow. This document is designed to provide a brief overview of these procedures and to suggest an appropriate sequence of carrying out these procedures.

4.3 Statistical procedures often result in interpretations that are not absolutes. Sometimes the information obtained may be inadequate or incomplete, which may lead to additional questions and the need for further experimentation. Information outside the data is also important in establishing standards and in the interpretation of numerical results.

5. Summary of Guide

5.1 Outlined below is a suggested sequence of four phases useful in the development of a test method. A flowchart is provided in Fig. 1. Such a sequence of analyses may need to be modified in specific situations. The assistance of a qualified statistician is recommended at each review phase.

5.2 Design Phase:

5.2.1 This phase includes the formalization of the scope and the significance and use sections. It may include determining the purpose and describing a general approach to the test method but usually does not involve statistical studies.

5.3 Development Phase—

5.3.1 Studies may be conducted to evaluate the basic performance of the method. The draft test method is prepared and sampling requirements and the test result (see Guide **E2282**) are clearly defined.

5.3.2 A flow chart is extremely valuable to identify the sequence of operations involved in a test method, for example, the sampling steps required to obtain the test specimens, definition of the test determination, how a test result is to be computed, and running the tests on the specimens.

5.4 Validation Phase

5.4.1 The test method is examined for such concerns as its stability, ruggedness, statistical control and the contributions to variability. The completion of this phase should result in preliminary estimates of precision and the identification and suggested ways to estimate potential contributors to uncertainty.

5.4.2 *Evaluation of Short Term Control of Test Method*—A test method must exhibit an ability to provide consistent results at least over short time periods. Preliminary studies or a pilot

⁴ See the Form and Style Manual for ASTM Standards that specifies, when possible, precision statements shall be estimated based on the results of an interlaboratory test program.

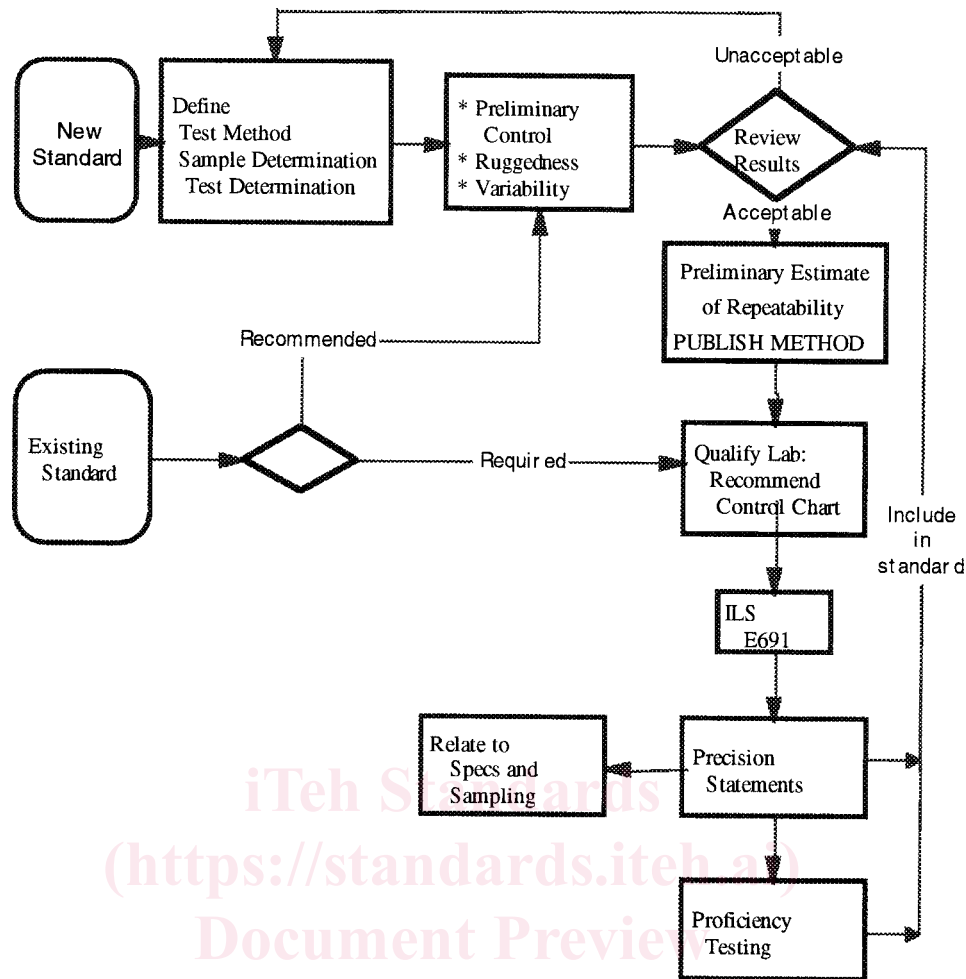


FIG. 1 Sequence of Steps

ASTM E1488-09

test should be conducted to evaluate the short term stability of the test method. A small series of repeated tests should be conducted.

5.4.3 *Analysis of Variability*—Statistically designed experiments conducted in one or two laboratories can be used to assess the relative magnitudes of different sources or potential contributors to variability of the test results. Such studies can provide estimates of intermediate measures of precision.

5.4.4 *Ruggedness Test*—A ruggedness test (see Practice E1169) is a statistically designed experiment that helps identify problems in running the test method, clarifies errors, and points out possible environmental conditions, which may adversely affect the test method or point out need for tightening requirements. The ruggedness test can assist in locating ways of reducing variability in the test method.

5.4.5 *Preliminary Estimates of Precision*—From the various studies conducted in accordance with 5.4.2–5.4.4, preliminary estimates of repeatability standard deviations should be developed and published in this test method. Until an interlaboratory study is performed, these estimates generally are considered to be provisional. Information on how a lab should develop uncertainty estimates should also be provided.

5.4.6 *Statistical Control*—A test method must show capability of performing in a consistent way over time. The use of control charts (see Manual 7)⁴ to monitor a proposed, or existing, test method over time is one recommended way to examine the controllability or stability of a test method. This statistical control should be demonstrated in one or two laboratories using homogeneous material (test specimen).

5.5 *Evaluation Phase:*

5.5.1 The test method is subjected to interlaboratory studies to provide estimates of within-laboratory repeatability and between-laboratory reproducibility. Additional information is supplied from proficiency studies when conducted.

5.5.2 *Interlaboratory Study (ILS)*—In accordance with ASTM Form and Style Manual, whenever feasible, an interlaboratory study must be conducted. This procedure will provide specific estimates of variation anticipated when using the test method.

5.5.3 Protocol for the ILS, Practice E691 provides a guide for developing the ILS for the test method. A first step is the writing of an ILS Protocol, which will set out what needs to be

done before the test specimens (or test materials) are distributed to the participating laboratories.

5.5.4 *Precision Statements*—Using the estimates of variation obtained in the interlaboratory test, one may prepare precision statements using Practices E691 and E177 or equivalent procedures.

6. Development of Test Method — Sampling and Test Result

6.1 Proposed standards that are under development should be treated in a formal manner following as many of the suggested procedures as possible. Standards that are already in existence as approved test methods or in general practice require periodic review that would include selected procedures.

6.2 *Under Development*—The development stage involves test methods that are in the preliminary stages during which equipment may not have been fully tested, practices are not agreed upon, and operators have yet to be adequately trained. Often this stage also applies to standards that have not yet been approved.

6.2.1 It is essential that tests for statistical control, ruggedness, and variability analyses be conducted prior to any interlaboratory test programs.

6.2.2 After all major environmental contributors have been identified, controlled, and incorporated into the test method, and after adequate standardized equipment is available, an interlaboratory test can be conducted. The interlaboratory test program must be completed prior to the first 5-year review. The committee should strive to have interlaboratory results as soon as possible.

6.2.3 After evaluating data from ruggedness tests, variability analysis, or an interlaboratory test program, changes to the test method may be suggested.

6.2.4 If major changes are made to the test method, a repeat of the various steps is usually necessary. Precision and bias statements should reflect the most current version of the test method.

6.3 *Existing Standards*—These standards comprise test methods that are in common use for which standard equipment may exist and for which experienced operators have been trained and are available.

6.3.1 Control charting, ruggedness tests, and variability analyses will be useful, especially if they have not previously been conducted. Such tests may provide better information about variation and necessary tolerances than has previously been available.

6.3.2 If precision estimates have not been established through an actual interlaboratory test program, then such a program should be initiated.

7. Data and Sampling

7.1 *Sample Determination:*

7.1.1 The sampling section of a standard should indicate clearly what constitutes the primary sampling unit, how that sampling unit is further subdivided, and how multiple test values are designated.

7.1.2 In considering the implication of test results as they relate to the material, the test method should be clear as to whether the sampling method or the test is destructive or nondestructive.

7.1.3 The user of the test method should be aware of whether the standard calls for a random sample. In some standards, as for example in sampling from coils or rolls of material, samples may be taken only from certain portions of the material.

7.2 *Test Result Determination*—The procedure for determining a test result must be clear and unambiguous.

7.2.1 An observation leads to an observed value.

7.2.2 Several observed values may lead to a test determination. The observed values need not be the same type of measurements (for example, they may consist of three readings such as length, width, and mass).

7.2.3 Several Test determinations may lead to a test result, as by averaging three test determinations.

7.2.4 A test result is the consequence of a single execution of the entire test method.

7.3 *Type of Data*—The kind of data that results from the application of the test method determines the types of statistical analyses to be performed.

7.3.1 *Numerical versus Categorical/Attribute Data*—Most of the statistical procedures referred to in this standard deal with numerical data. Control charts are available for all types of data, but all interlaboratory test procedures currently in use depend on numerical data.

7.3.2 *“Normally” Distributed Data*—Most of the statistical procedures referred to in this guide consider that the unknown distribution of the test results can be modeled by a normal distribution.

8. Sources of Variability

8.1 Experimental Realization of a Test Method

8.1.1 A realization of a test method refers to an actual application of the test method to produce a test result as specified by the test method. The realization involves an interpretation of the written document by a specific test operator, who uses a specific unit and version of the specified test apparatus, in the particular environment of his testing laboratory, to evaluate a specified number of test specimens of the material to be tested. Another realization of the test method may involve a change in one or more of the above emphasized experimental factors. The test result obtained by another realization of the test method will usually differ from the test result obtained from the first realization. Even when none of the experimental factors is intentionally changed, small changes usually occur. The outcome of these changes may be seen as variability among the test results.

8.1.2 Each of the above experimental factors and all others, known and unknown, that can change the realization of a test method, are potential sources of variability in test results. Some of the more common factors are discussed in Sections 8.2 to 8.6

8.2 Operator