



Designation: ~~E2177-01~~ Designation: E2177 - 01 (Reapproved 2009)

## Standard Test Method for Measuring the Coefficient of Retroreflected Luminance ( $R_L$ ) of Pavement Markings in a Standard Condition of Wetness<sup>1</sup>

This standard is issued under the fixed designation E2177; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This test method covers the measurement of the wet retroreflective ( $R_L$ ) properties of horizontal pavement marking materials, such as traffic stripes and road surface symbols, using a portable or mobile retroreflectometer that can be placed on or before the road marking to measure the retroreflection at the prescribed geometry.

1.2 This method of measuring the wet retroreflective properties ( $R_L$ ) of pavement markings measures the wet retroreflectivity in a standard condition of wetness (see Fig. 1).

1.2.1 *Discussion*—This test condition typically exists (1) after a rainfall has ended and the pavement markings are still wet or (2) as the markings are wet from dew or humidity.

1.3 Retroreflective performance obtained with this test in conditions of wetness does not necessarily relate to how markings perform in conditions of rain, that is, as markings are being rained upon.

NOTE 1—Test Method E2176 defines a method to use to measure the performance of pavement markings in conditions of simulated rain.

1.4 This test method specifies the use of portable or mobile reflectometers that can measure pavement markings in accordance with Test Method E1710.<sup>2</sup> The entrance and observation angles required of the retroreflectometer in this test method are commonly referred to as “30 meter geometry.”<sup>2</sup>

*1.5 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

1.5 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

*1.6 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

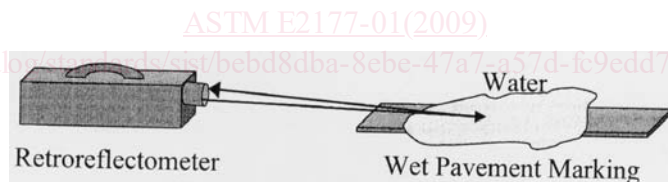


FIG. 1 Illustration of Measurement

### 2. Referenced Documents

2.1 *ASTM Standards*:<sup>3</sup>

D6359 [Specification for Minimum Retroreflectance of Newly Applied Pavement Marking Using Portable Hand-Operated Instruments](#)

E691 [Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method](#)

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee E12 on Color and Appearance and is the direct responsibility of Subcommittee E12.10 on Retroreflection. Current edition approved Dec. 10, 2001. Published February 2002. DOI: 10.1520/E2177-01.

Current edition approved Dec. 1, 2009. Published December 2009. Originally approved in 2001. Last previous edition approved in 2001 as E2177 - 01. DOI: 10.1520/E2177-01R09.

<sup>2</sup> Reference ASTM E1710 “Standard Test Method for Measurement of Retroreflective Pavement Markings with CEN-Prescribed Geometry Using a Portable Retroreflectometer.” The standard measurement condition is intended to represent the angles corresponding to a distance of 30 m for the driver of a passenger car with an eye height of 1.2 m and a headlight height of 0.65 m above the road. See Appendix X1.

<sup>3</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

~~EB965 Test Method for Measuring Pavement Macrotexture Depth Using a Volumetric Technique—Specification for High Performance Tin-Coated Annealed Copper Wire Intended for Electrical and Electronic Application for Solderability~~

~~E1710 Test Method for Measurement of Retroreflective Pavement Marking Materials with CEN-Prescribed Geometry Using a Portable Retroreflector~~

E2176 Test Method for Measuring the Coefficient of Retroreflected Luminance of Pavement Markings in a Standard Condition of Continuous Wetting ( $R_{L-Rain}$ )

2.2 Other Standard:

CEN-EN 1436 Road Marking Materials—Road Marking Performance for Road Users<sup>4</sup>

### 3. Terminology

3.1 *coefficient of retroreflected luminance,  $R_L$ ,  $n$* —the ratio of the luminance,  $L$ , of a projected surface to the normal illuminance,  $E$ , at the surface on a plane normal to the incident light, expressed in candelas per square metre per lux [(cd·m<sup>-2</sup>)/lx]. Because of the low luminance of pavement markings, the units commonly used are millicandelas per square metre per lux [(mcd·m<sup>-2</sup>)/lx].

3.2 *condition of wetness* condition of wetness,  $n$ —the test condition is created by liberally wetting the road marking and waiting a certain time period after wetting for water to run off.

3.2.1 *Discussion*—Similar conditions exist when road markings are wet or damp such as typically found after a rain has ended or from dew and high humidity.

3.3 *mobile retroreflector* mobile retroreflector,  $n$ —a retroreflector that has been mounted to a vehicle for purposes of taking measurements while the vehicle is moving.

3.4 *portable retroreflector* portable retroreflector,  $n$ —an instrument that can be used in the field or laboratory for measuring the coefficient of retroreflected luminance,  $R_L$ .

3.5 “recovery method” or “bucket method” ,  $n$ —alternative names commonly used to describe this test method for achieving measurements in condition of wetness.

3.6  $R_{L-wet}$ ,  $n$ —the retroreflectance value,  $R_L$ , obtained 45 s after wetting. (See Fig. 2.)

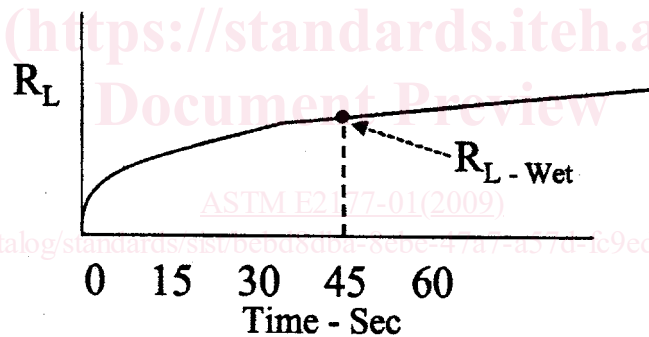


FIG. 2 Definition of  $R_{L-wet}$

### 4. Significance and Use

4.1 The nighttime performance of pavement markings is determined by the coefficient of retroreflected luminance,  $R_L$ , be it dry or wet, and depends on the materials used, age, and wear pattern. These conditions shall be observed and noted by the user.

4.2 Under the same conditions of headlight illumination and driver’s viewing, larger values of  $R_L$  correspond to higher levels of visual performance at corresponding geometry.

4.3 The pavement marking’s measured performance in the standard condition of wetness is used to characterize the performance of the marking on the road when wet.

4.4 Newly installed pavement markings may have a natural surface tension or release agents that prevent wetting of the product by water. The water will tend to “bead up” on the marking. This “non wetting” condition is usually short lived. Pavement markings that have been on the road for one month prior to testing usually do not exhibit this non-wetting phenomenon. (**Warning**—This phenomenon produces an interference when assessing the wet characteristics of a pavement marking. Attempts to measure markings with this surface “non-wetting” or “beading” of the water may give higher values.)

4.5 The retroreflectivity,  $R_L$ , of pavement (road) markings degrades with traffic wear and requires periodic measurement to ensure that sufficient line visibility is provided to drivers. For example see Specification D6359 for dry retroreflectivity requirements.

<sup>4</sup> Available from European Committee for Standardization (CEN), 36 rue de Stassart, B-1050, Brussels, Belgium, <http://www.cenorm.be>.