

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE

BASIC SAFETY PUBLICATION

PUBLICATION FONDAMENTALE DE SÉCURITÉ

**Environmental testing –**  
**Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test**  
(standards.iteh.ai)

**Essais d'environnement –**  
**Partie 2-38: Essais – Essai Z/AD: Essai cyclique composite de température et d'humidité**

IEC 60068-2-38:2009  
<https://standards.iteh.ai/catalog/standards/sist/1867a59-c5bc-4975-8075-e8854b235924/iec-60068-2-38-2009>





## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

[IEC 60068-2-38:2009](tel:+4122382009)

- Electropedia: [www.electropedia.org](http://www.electropedia.org) [www.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-](http://www.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

### A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: [www.iec.ch/searchpub/cur\\_fut-f.htm](http://www.iec.ch/searchpub/cur_fut-f.htm)

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: [www.iec.ch/webstore/custserv/custserv\\_entry-f.htm](http://www.iec.ch/webstore/custserv/custserv_entry-f.htm)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00



IEC 60068-2-38

Edition 2.0 2009-01

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE

BASIC SAFETY PUBLICATION

PUBLICATION FONDAMENTALE DE SÉCURITÉ

**Environmental testing –**  
**Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test**  
(standards.iteh.ai)

**Essais d'environnement –**  
**Partie 2-38: Essais – Essai Z/AD: Essai cyclique composite de température et**  
**d'humidité**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

PRICE CODE  
CODE PRIX

N

ICS 19.040

ISBN 978-2-88910-038-5

## CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references .....	5
3 General .....	5
3.1 Description of the test .....	5
3.2 Application of the test.....	6
4 Description of test chamber .....	6
4.1 Chamber for exposure to moisture.....	6
4.2 Chamber for exposure to cold.....	7
5 Severities .....	7
6 Testing procedure .....	7
6.1 Preconditioning (see figure 1).....	7
6.2 Initial measurements .....	8
6.3 Conditioning .....	8
6.4 Test cycle.....	12
6.4.1 Description of temperature/humidity subcycle .....	12
6.4.2 Description of cold subcycle.....	12
6.4.3 Description of 24 h cycles with no exposure to cold .....	13
6.4.4 Description of final cycle.....	13
6.5 Final measurements .....	13
6.5.1 At high humidity .....	13
6.5.2 Immediately upon removal from the chamber.....	13
6.5.3 After final drying .....	13
7 Information to be given in the relevant specification .....	14
8 Information to be given in the test report .....	14
Figure 1 – Preconditioning .....	8
Figure 2 – Exposure to humidity followed by exposure to cold .....	10
Figure 3 – Exposure to humidity not followed by exposure to cold.....	11

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## ENVIRONMENTAL TESTING –

**Part 2-38: Tests –  
Test Z/AD: Composite temperature/humidity cyclic test**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60068-2-38 has been prepared by IEC technical committee 104: Environmental conditions, classification and methods of test.

This second edition cancels and replaces the first edition, published in 1974, and constitutes a technical revision.

The major changes with regard to the previous edition concern the updating of the figures, changes to some of the wording and editorial corrections made for clarification.

The text of this standard is based on the following documents:

FDIS	Report on voting
104/482/FDIS	104/487/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

It has the status of a basic safety publication in accordance with IEC Guide 104.

A list of all the parts in the IEC 60068 series, under the general title *Environmental testing*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

## **iTeh STANDARD PREVIEW (standards.iteh.ai)**

[IEC 60068-2-38:2009](https://standards.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-e8854b235924/iec-60068-2-38-2009)

<https://standards.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-e8854b235924/iec-60068-2-38-2009>

## ENVIRONMENTAL TESTING –

### Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test

#### 1 Scope

IEC 60068-2-38 provides a composite test procedure, primarily intended for component type specimens, to determine, in an accelerated manner, the resistance of specimens to the deteriorative effects of high temperature/humidity and cold conditions.

#### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60068-2-30, *Environmental testing – Part 2-30: Tests – Test Db: Damp heat, cyclic (12 h + 12 h cycle)*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

[IEC 60068-2-38:2009](http://standards.iteh.ai/iec-60068-2-38-2009)

IEC Guide 104, *The preparation of safety publications and the use of basic safety publications and group safety publications*

#### 3 General

##### 3.1 Description of the test

Test Z/AD is a cyclic temperature/humidity test which is designed to reveal defects in test specimens caused by "breathing" as distinct from the absorption of moisture.

This test differs from other cyclic damp heat tests in that it derives its increased severity from:

- a) a greater number of temperature variations or "pumping" actions in a given time;
- b) a greater cyclic temperature range;
- c) a higher cyclic rate of change of temperature;
- d) the inclusion of a number of excursions to sub-zero temperatures.

The accelerated breathing and the effect of the freezing of trapped water in cracks and fissures are the essential features of this composite test.

It is emphasized, however, that the freezing effect will occur only if the fissure dimensions are large enough to allow the penetration of a coherent mass of water as is normally the case in fissures between seals and metal assemblies, or between seals and wire terminations.

The degree of condensation will depend mainly upon the thermal time constant of the surface of the test specimens and may be negligible for very small specimens but copious for large specimens.

Similarly, the breathing effect will be more apparent on specimens which contain relatively large air-filled or gas-filled voids, but again, the severity of the test will depend to some extent on the thermal characteristics of the specimens.

### 3.2 Application of the test

For the reasons given above, it is recommended that this test procedure be limited to component type specimens when the construction of the specimens suggests a "breathing" type of damp heat test combined with icing and where the thermal characteristics are compatible with the rates of change of temperature, etc. of test Z/AD.

For solid type specimens, e.g. plastic encapsulated, where there may be small hairline cracks or porous material, the absorption or diffusion mechanisms will predominate and a steady damp heat such as test C of IEC 60068-2-78 is preferred for investigating these effects.

For larger specimens such as equipment or when it is essential for components to ensure thermal stability during the various phases of the cycle, test Db of IEC 60068-2-30 should be employed, although due to the reduced number of cycles in a given period, the degree of acceleration may not be as fast. In this case, test Db should normally form part of a sequence such as that defined in IEC 60068-1.

As in other damp heat tests, a polarizing voltage or electrical loading may be applied to the specimens. In the case of electrical loading, the loading should be such that the temperature rise of the specimens does not unduly affect the chamber conditions.

From the above, test Z/AD should not be considered to be interchangeable with, or an alternative to, either steady-state or other cyclic damp heat tests, but the choice of test procedure should be made with due regard for the physical and thermal characteristics of the test specimens and the types of failure mechanisms which are significant for each particular case.

<https://standards.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-e8854b235924/iec-60068-2-38-2009>

## 4 Description of test chamber

The exposure to moisture, followed by cold, can either be performed in one chamber or in two separate chambers.

### 4.1 Chamber for exposure to moisture

The chamber for the exposure to moisture shall be so constructed that:

- a) The temperature can be varied between  $25\text{ °C} \pm 2\text{ K}$  and  $65\text{ °C} \pm 2\text{ K}$  in a period of between 1,5 h and 2,5 h for both rising and falling temperatures.
- b) The relative humidity can be maintained at  $(93 \pm 3)\%$  during the periods of constant or rising temperature and between 80 % RH and 96 % RH during the falling temperature periods.
- c) The conditions prevailing at any point in the working space are uniform and are as similar as possible to those prevailing in the immediate vicinity of suitably located temperature- and humidity-sensing devices.

The air in the chamber shall therefore be continuously stirred at a rate necessary to maintain the specified conditions of temperature and humidity.

- d) The specimens under test shall not be subjected to radiant heat from the chamber conditioning processes.
- e) Water used for the maintenance of chamber humidity shall have a resistivity of not less than 500  $\Omega\text{m}$ .
- f) Condensed water shall be continuously drained from the chamber and not used again unless it has been repurified.



Precautions shall be taken to ensure that no condensed water from the walls and roof of the test chamber can fall on the specimens.

#### 4.2 Chamber for exposure to cold

The chamber for exposure to cold shall be so constructed that

- a) the temperature can be maintained at  $-10\text{ °C} \pm 2\text{ K}$ ,
- b) the conditions prevailing at any point in the working space are uniform and are as similar as possible to those prevailing in the immediate vicinity of suitably located temperature-sensing devices,

The air in the chamber shall therefore be continuously moving.

Care shall be taken that the thermal capacity of the specimen under test does not appreciably influence conditions within the chamber.

The humidity chamber may be used for exposure to cold, in which case it shall meet the requirements of 4.1 and, in addition, shall be so constructed that

- 1) the temperature can be lowered from  $25\text{ °C} \pm 2\text{ K}$  to  $-10\text{ °C} \pm 2\text{ K}$  in a period of not more than 30 min,
- 2) the specimen can be held at a temperature of  $-10\text{ °C} \pm 2\text{ K}$  for a period of 3 h,
- 3) the temperature can be raised from  $-10\text{ °C} \pm 2\text{ K}$  to  $25\text{ °C} \pm 2\text{ K}$  in a period of not more than 90 min.

(standards.iteh.ai)

#### 5 Severities

[IEC 60068-2-38:2009](https://standards.iteh.ai/catalog/standards/sist/60068-2-38-2009)

The number of 24 h cycles shall be 10, unless otherwise specified. If other than 10, the relevant specification shall define the number.

#### 6 Testing procedure

##### 6.1 Preconditioning (see Figure 1)

Unless otherwise specified, the specimens in the unpacked, switched-off, ready-for-use state shall be subjected to the conditions for "assisted drying" specified in IEC 60068-1 ( $55\text{ °C} \pm 2\text{ K}$  with a relative humidity not exceeding 20 %) for a period of 24 h prior to the first cycle of the damp heat test.

The specimens shall then be allowed to attain thermal stability at standard atmospheric conditions for testing, or as otherwise specified, before the initial measurements are made.

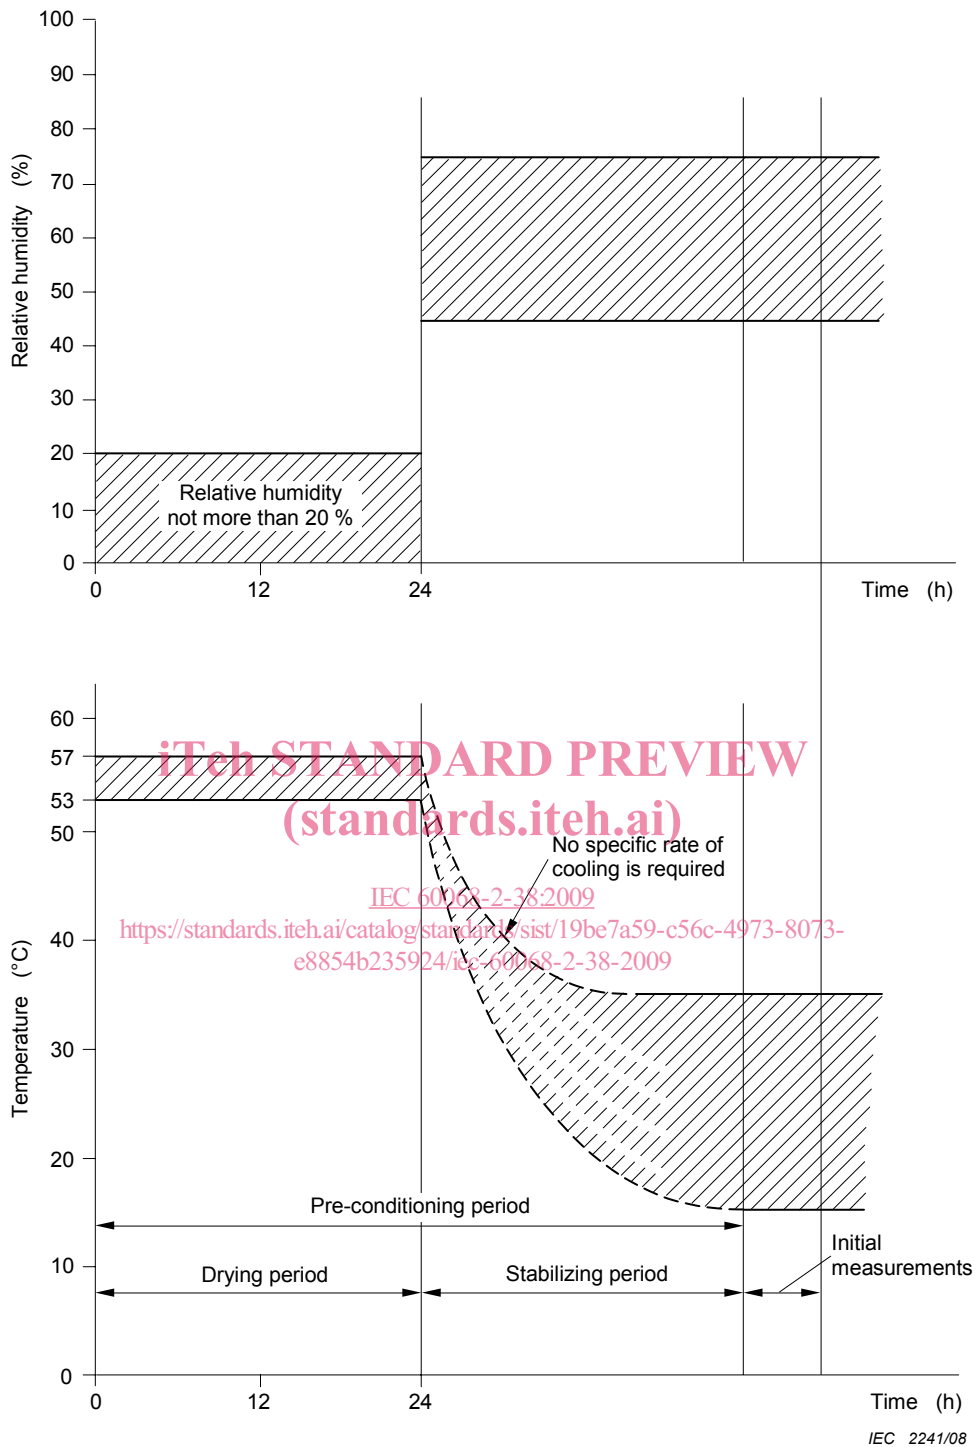


Figure 1 – Preconditioning

### 6.2 Initial measurements

The specimens shall be visually inspected and electrically and mechanically checked as required by the relevant specification.

### 6.3 Conditioning

The total temperature tolerance of  $\pm 2$  K given in this standard is intended to take account of absolute errors in the measurement, slow changes of temperature and temperature variations of the working space. However, in order to maintain the relative humidity within the required

tolerances, it is necessary to keep the temperature difference between any two points in the working space at any moment within narrower limits. The required humidity conditions will not be achieved if such temperature differences exceed 1 K. It may also be necessary to keep short-term fluctuations within  $\pm 0,5$  K to maintain the required humidity.


The specimens shall be introduced into the humidity chamber, in the unpacked, switched-off, ready-for-use state, and mounted in the normal orientation, if this is known, or as otherwise specified and shall be subjected to 10 temperature/humidity cycles, each of 24 h duration.

During any five of the first nine of the above cycles after exposure to the humidity subcycle (points a) to f) in Figure 2), the specimens shall be subjected to cold. The position of the cold subcycles should be defined in the relevant specification.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 60068-2-38:2009](https://standards.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-e8854b235924/iec-60068-2-38-2009)

<https://standards.iteh.ai/catalog/standards/sist/19be7a59-c56c-4973-8073-e8854b235924/iec-60068-2-38-2009>

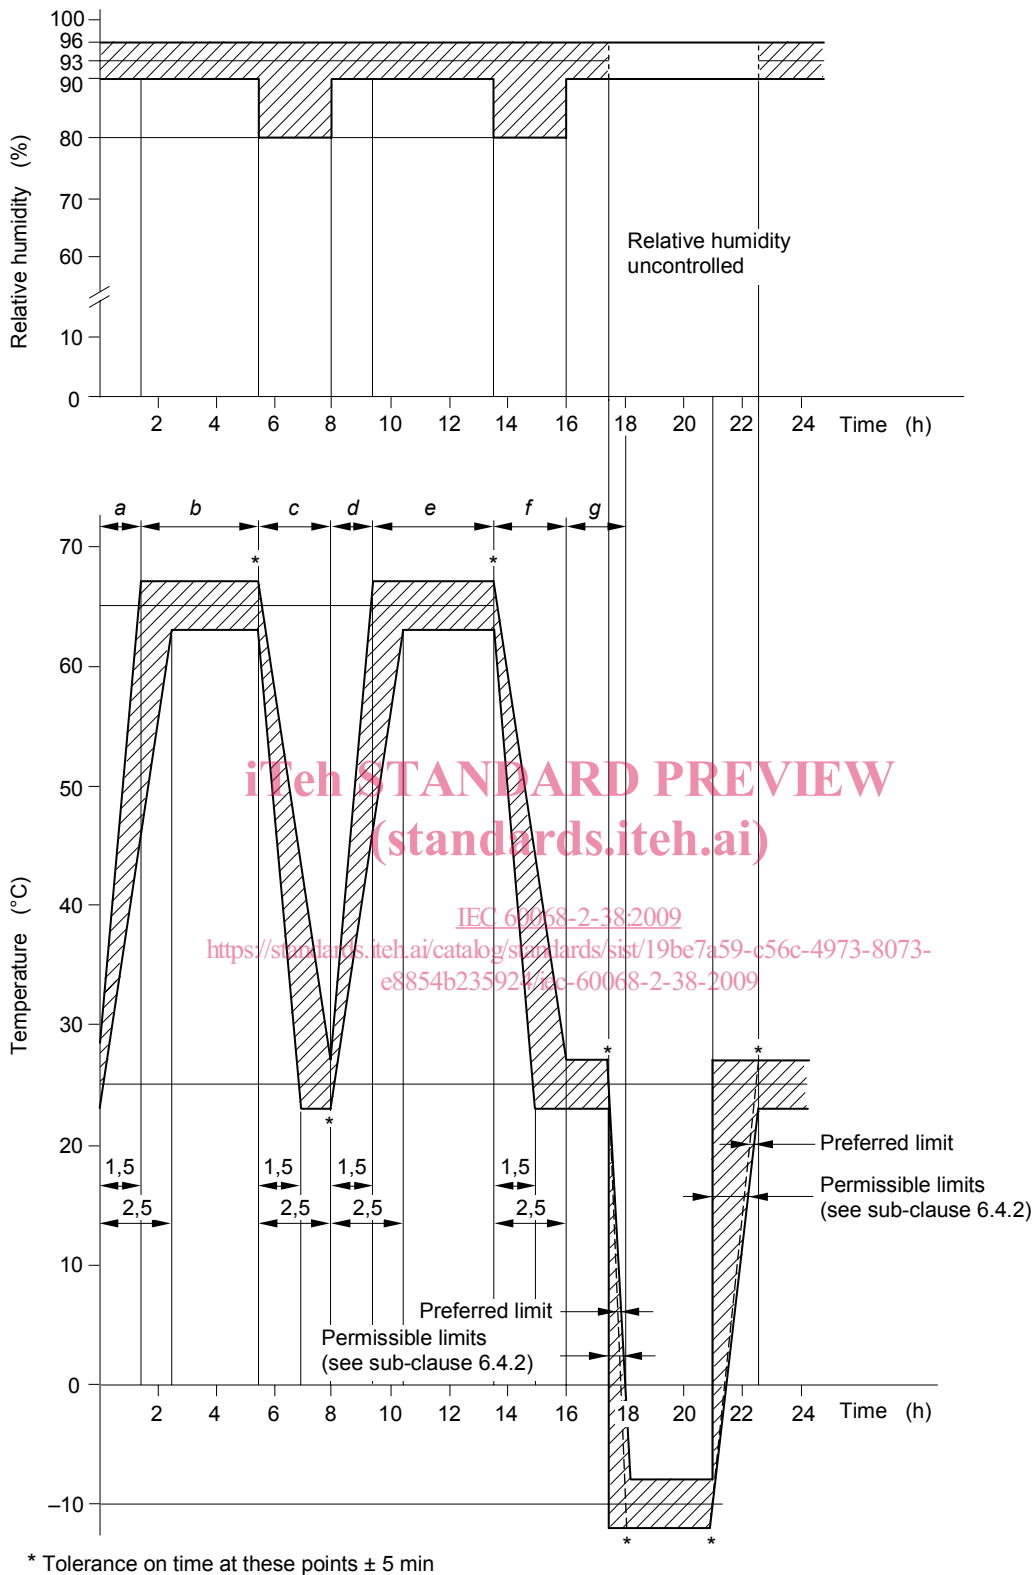

**Figure 2 – Exposure to humidity followed by exposure to cold**

This exposure may be performed either in the same chamber or in separate chambers. If separate chambers are used for the high-temperature/high-humidity and low-temperature/high-humidity subcycles of the test, the specimens should not be subjected to thermal shock conditions unless it is known that they are insensitive to this degree of thermal shock.