



Designation: ~~D2878-95 (Reapproved 2009)~~ Designation: D2878 – 10

Standard Test Method for Estimating Apparent Vapor Pressures and Molecular Weights of Lubricating Oils¹

This standard is issued under the fixed designation D2878; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers a calculation procedure for converting data obtained by Test Method D972 to apparent vapor pressures and molecular weights. It has been demonstrated to be applicable to petroleum-based and synthetic ester lubricating oils,² at temperatures of 395 to 535K (250 to 500°F). However, its applicability to lubricating greases has not been established.

NOTE 1—Most lubricants boil over a fairly wide temperature range, a fact recognized in discussion of their vapor pressures. For example, the apparent vapor pressure over the range 0 to 0.1 % evaporated may be as much as 100 times that over the range 4.9 to 5.0 % evaporated.

1.2 The values stated in SI units are to be regarded as the standard. In cases in which materials, products, or equipment are available in inch-pound units only, SI units are omitted.

1.3

1.3 **WARNING**—Mercury has been designated by many regulatory agencies as a hazardous material that can cause central nervous system, kidney and liver damage. Mercury, or its vapor, may be hazardous to health and corrosive to materials. Caution should be taken when handling mercury and mercury containing products. See the applicable product Material Safety Data Sheet (MSDS) for details and EPA's website—<http://www.epa.gov/mercury/faq.htm>—for additional information. Users should be aware that selling mercury or mercury containing products into your state or country may be prohibited by law.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability or regulatory limitations prior to use.* For specific warning statements, see 6.2, 7.1, 8.2, and Annex A2.

2. Referenced Documents

2.1 *ASTM Standards:*³

A240/A240M Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

D92 Test Method for Flash and Fire Points by Cleveland Open Cup Tester

D972 Test Method for Evaporation Loss of Lubricating Greases and Oils

D2503 Test Method for Relative Molecular Mass (Molecular Weight) of Hydrocarbons by Thermoelectric Measurement of Vapor Pressure

D2595 Test Method for Evaporation Loss of Lubricating Greases Over Wide-Temperature Range

D2883 Test Method for Reaction Threshold Temperature of Liquid and Solid Materials ~~E1 Specification for ASTM Liquid-in-Glass Thermometers~~

E659 Test Method for Autoignition Temperature of Liquid Chemicals

3. Terminology

3.1 *Definitions of Terms Specific to This Standard:*

3.1.1 *apparent vapor pressure (p), n*—the time-averaged value of the vapor pressure from the start to the end of the evaporation test.

3.1.1.1 *Discussion*—While this may include some effects of differences in nonideality of the vapor, heat of vaporization, surface

¹ This test method is under the jurisdiction of Committee D02 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.11 on Engineering Sciences of High Performance Fluids and Solids.

Current edition approved Oct. 1, 2009-2010. Published November 2009-October 2010. Originally approved in 1970. Last previous edition approved in 2005-2009 as D2878-95(20059). DOI: ~~10.1520/D2878-95R09~~10.1520/D2878-10.

² Coburn, J. F., "Lubricant Vapor Pressure Derived from Evaporation Loss," *Transactions*, American Society of Lubricating Engineers, ASLTA, Vol 12, 1969, pp. 129-134.

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

tension, and viscosity between the *m*-terphenyl and the lubricating oil, these factors have been demonstrated to be negligible. Unless stated, this average shall cover the range 0 to $5 \pm 1\%$.

3.1.2 *cell constant* (k), n —the ratio of the amount of *m*-terphenyl or lubricating oil carried off per unit volume of gas to that predicted by Dalton's law.

$$k = 22.41 PW / VpM \quad (1)$$

where:

k = cell constant

P = ambient atmospheric pressure, torr

W = mass of lubricant evaporated, g

V = volume of gas passed through all litres at 273K and 101.3 kPa (760 torr)

p = apparent vapor pressure, torr

M = mole average molecular weight of lubricant vapor, g/mole

T = test temperature, K

It has been empirically determined that for *m*-terphenyl in air

$$k = 0.1266 - 12.60 / (T - 273) \quad (2)$$

and that the cell constant is independent of the composition of the lubricant.

3.1.3 Test Method D972 is normally run with air, which may cause changes in easily oxidized fluids. In such cases, use of common reactive gas nitrogen and recalibration to obtain a slightly different cell constant (k') is mandatory.

4. Summary of Test Method

4.1 The test is run at the selected temperature for a sufficient time to give the selected amount of evaporation, which is $5 \pm 1\%$ unless otherwise specified. This evaporation rate is compared with a standard value for pure *m*-terphenyl to yield the apparent vapor pressure and molecular weight of the lubricating oil as defined in Section 3.

5. Significance and Use

5.1 The vapor pressure of a substance as determined by measurement of evaporation reflects a property of the bulk sample. Little weight is given by the procedure to the presence of low concentrations of volatile impurities.

5.2 Vapor pressure, *per se*, is a thermodynamic property that is dependent only upon composition and temperature for stable systems. In the present method, composition changes occur during the course of the test so that the contribution of minor amounts of volatile impurities is minimized.

6. Apparatus

6.1 *Evaporation Cell*, as described in Annex A1. [ASTM D2878-10](#)

6.2 *Air Supply System*, capable of supplying to the cell the required flow of air free of entrained particles (**Warning**—Compressed gas under high pressure. Use with extreme caution in the presence of combustible material, since the autoignition temperatures of most organic compounds in air are drastically reduced at elevated pressures. See Annex A2.1.). A 410-mm (16-in.) length of 1-in. diameter pipe packed with glass wool has been found satisfactory for filtering the air.

6.3 *Oil Bath*, as described in Annex A1.

NOTE 2—Other constant-temperature baths may be used if the exit air passing over the grease sample is at the test temperature ($\pm 0.5\text{K}$ (1°F)).

6.4 *Thermometers*—ASTM thermometers graduated in either Celsius or Fahrenheit degrees and having a range from -5 to 400°C (20 to 760°F) and conforming to the requirements for Thermometers 3C or 3F, respectively, as described in Specification E1.

6.5 *Temperature Measuring Devices*—Resistance thermometers, thermocouples, or liquid-in-glass thermometers calibrated to accuracy within $\pm 0.5^\circ\text{C}$ ($\pm 1.0^\circ\text{F}$) may be used. The use of mercury-in-glass thermometers of equal accuracy is permitted, although it is discouraged.

6.5 *Flowmeter*⁴—A rotameter calibrated to deliver air at a rate of 2.583 ± 0.02 g/min between 289 and 302K (60 and 85°F) (2 L/min at standard temperature and pressure). It shall be furnished with a needle valve and mounted as shown in Fig. 1.

6.6 *Oil Sample Cup*, as described in Fig. 1 and A1.1.2.

7. Calibration of Equipment

7.1 It is assumed that equipment conforming to Test Method D972 in design and installation needs no calibration. If questions arise, carry out the procedure using *m*-terphenyl (**Warning**—Harmful or fatal if swallowed. See A2.2.) of good commercial quality. The following two points shall be determined:

⁴ The sole source of supply of the apparatus known to the committee at this time is Flowrater meter, Fisher and Porter Co., Hatboro, PA. If you are aware of alternative suppliers, please provide this information to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend.

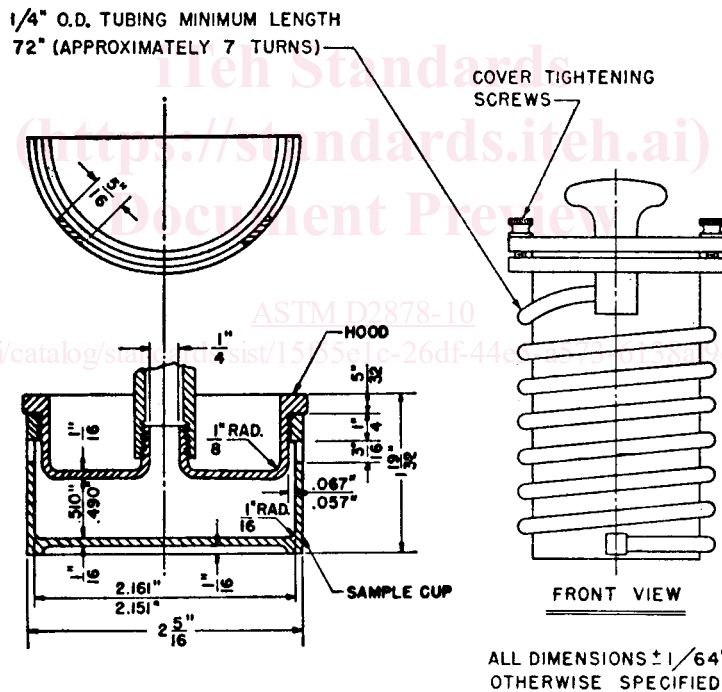
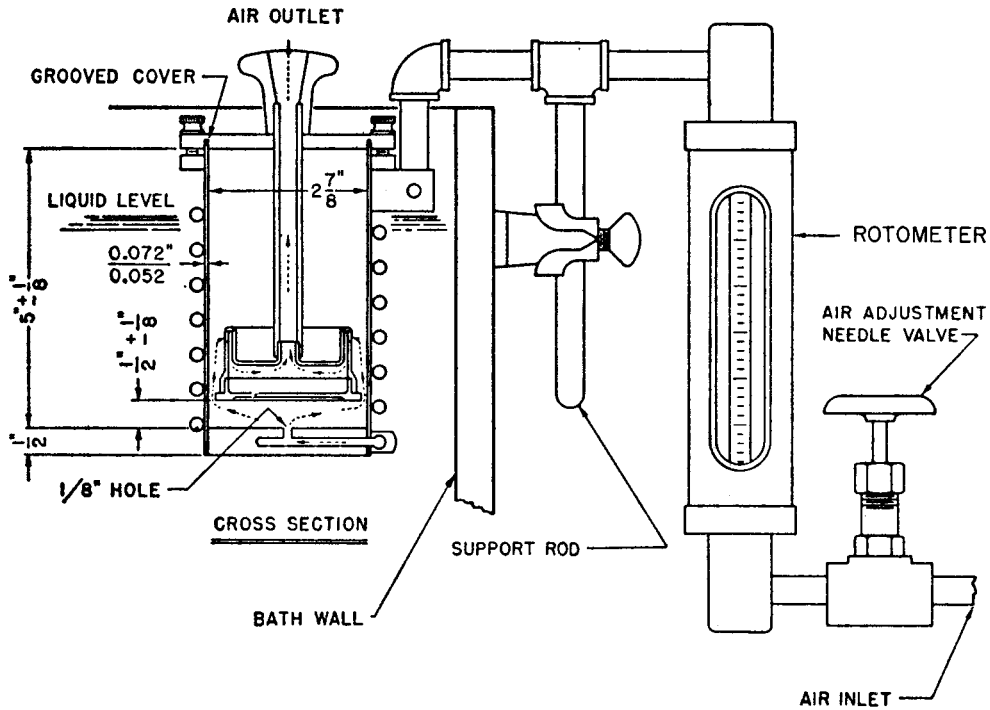


FIG. 1 Evaporation Test Cell

K	Temperature °F	Time, h	Evaporation to Conform to Eq 2, g
395	250	22	0.267 ± 0.027
420	300	6.5	0.503 ± 0.050

If the data do not fall within the above ranges, check flow rate and temperature. If these are correct, prepare a substitute equation for k' similar to Eq 2 and use it in Section 10. When use of nonreactive gas is required, this calibration is necessary as standard cell constants are not valid for gases other than air.

7.2 If the apparatus specified in Test Method D2595 is to be used, it shall be calibrated as described in 7.1.

8. Procedure

8.1 Weigh the clean test specimen cup and hood to the nearest 1 mg. Transfer, by means of a pipet, 10.00 ± 0.05 g of test