

FINAL  
DRAFT

INTERNATIONAL  
STANDARD

ISO/FDIS  
15500-17

ISO/TC 22/SC 41

Secretariat: UNI

Voting begins on:  
**2021-08-31**

Voting terminates on:  
**2021-10-26**

---

---

## Road vehicles — Compressed natural gas (CNG) fuel system components — Part 17: Flexible fuel line

*Véhicules routiers — Composants des systèmes de combustible gaz naturel comprimé (GNC) —*

**iTeh STANDARD PREVIEW**  
*Partie 17: Tuyauterie flexible pour combustible*  
**(standards.iteh.ai)**

ISO/FDIS 15500-17

<https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number  
ISO/FDIS 15500-17:2021(E)

© ISO 2021

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/FDIS 15500-17](https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17)  
<https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword .....	iv
Introduction .....	v
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Marking .....</b>	<b>2</b>
<b>5 Construction and assembly .....</b>	<b>2</b>
<b>6 Tests .....</b>	<b>3</b>
6.1 Applicability .....	3
6.2 Hydrostatic strength .....	3
6.3 Continued operation .....	4
6.4 Bending .....	4
6.5 Pull off .....	4
6.6 Electrical conductivity .....	5
6.7 Permeability .....	5
6.8 Automotive fluid .....	5
6.9 Verification of hose cover perforations .....	6
6.10 Vibration resistance .....	7
6.10.1 General .....	7
6.10.2 Method of test .....	7
<b>Bibliography .....</b>	<b>8</b>

[ISO/FDIS 15500-17](https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17)  
<https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 41, *Specific aspects for gaseous fuels*.

This third edition cancels and replaces the second edition (ISO 15500-17:2012), which has been technically revised. It also incorporates the Amendment ISO 15500-17:2012/Amd 1:2016.

The main changes compared to the previous edition are as follows:

- serial number or data code changed from recommended to mandatory in [Clause 4](#) "Marking";
- addition of requirements in [Clause 5](#) "Construction and assembly";
- addition of the following tests:
  - automotive fluids,
  - verification of hose cover perforations,
  - vibration resistance.

A list of all parts in the ISO 15500 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

For the purposes of this document, all fuel system components in contact with natural gas have been considered suitable for natural gas as defined in ISO 15403-1. However, it is recognized that miscellaneous components not specifically covered herein can be examined to meet the criteria of this document and tested according to the appropriate functional tests.

All references to pressure in this document are considered to be gauge pressures unless otherwise specified.

This document is based on a service pressure for natural gas used as fuel of 20 MPa [200 bar<sup>1)</sup>] settled at 15 °C. Other service pressures can be accommodated by adjusting the pressure by the appropriate factor (ratio). For example, a 25 MPa (250 bar) service pressure system will require pressures to be multiplied by 1,25.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/FDIS 15500-17](https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17)

<https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17>

---

1) 1 bar = 0,1 MPa = 10<sup>5</sup> Pa 1 MPa = 1 N/mm<sup>2</sup>.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/FDIS 15500-17

<https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17>

# Road vehicles — Compressed natural gas (CNG) fuel system components —

## Part 17: Flexible fuel line

### 1 Scope

This document specifies tests and requirements for the flexible fuel line, a compressed natural gas (CNG) fuel system component in accordance with SAE J517 (100R8 hose) or JIS B 8362 intended for use on the types of motor vehicles defined in ISO 3833.

This document is applicable to vehicles (mono-fuel, bi-fuel or dual-fuel applications) using natural gas in accordance with ISO 15403-1. It is not applicable to the following:

- a) liquefied natural gas (LNG) fuel system components located upstream of, and including, the vaporizer;
- b) fuel containers;
- c) stationary gas engines;
- d) container-mounting hardware;
- e) electronic fuel management;
- f) refuelling receptacles.

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO/FDIS 15500-17

[https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-](https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17)

[4215d43e846d/iso-fdis-15500-17](https://standards.iteh.ai/catalog/standards/sist/6b43349d-c925-46c6-9ce7-4215d43e846d/iso-fdis-15500-17)

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15500-1, *Road vehicles — Compressed natural gas (CNG) fuel system components — Part 1: General requirements and definitions*

ISO 15500-2:2016, *Road vehicles — Compressed natural gas (CNG) fuel system components — Part 2: Performance and general test methods*

ISO 15500-19, *Road vehicles — Compressed natural gas (CNG) fuel system components — Part 19: Fittings*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15500-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

## 4 Marking

Marking of the component shall provide sufficient information to allow the following to be traced:

- a) the manufacturer's or agent's name, trademark or symbol;
- b) the model designation (part number);
- c) the working pressure or pressure and temperature range;
- d) the serial number or date code.

The following additional markings are recommended:

- the direction of flow (when necessary for correct installation);
- the type of fuel;
- electrical ratings;
- the symbol of the certification agency;
- the type approval number;
- a reference to this document.

NOTE This information can be provided by a suitable identification code on at least one part of the component when it consists of more than one part.

## 5 Construction and assembly

The flexible fuel line shall comply with the applicable provisions of ISO 15500-1 and ISO 15500-2, and with the tests specified in [Clause 6](#). Tolerances should follow the specifications of ISO 15500-2.

**5.1** The nominal hose diameter shall refer to the finished internal diameter  $\pm 0,65$  mm for sizes up to and including 20 mm and  $\pm 1,25$  mm for sizes over 20 mm. A tapered plug gauge having a taper of 30 mm/m marked to indicate variation of 0,5 mm in diameter or other equivalent means may be used for measuring inside diameter.

**5.2** If an outer hose cover is used, it shall be constructed to minimize or prevent fluid penetration into the inner plies, braids, or tube. The inner plies, braids, or tube shall be resistant to the effects of common automotive fluids, as determined by the method of test in [6.8](#).

**5.3** Hose assemblies shall have end fittings that comply with ISO 15500-19 and that are permanently attached. Fittings or threaded end connectors shall be faced or otherwise finished externally to provide a standard wrench flat grip.

**5.4** In addition to the instruction in ISO 15500-1:2015, Clause 6, the following shall be included as a minimum:

- a) the hose or hose assembly shall not be kinked, twisted or torqued;
- b) contact with foreign objects or substances shall be avoided;
- c) the manufacturers specified minimum hose bend radius shall be noted and not be exceeded;
- d) the manufacturer shall provide appropriate installation instructions with cautionary notes for leak testing;



- e) the manufacturer shall provide installation instructions that state that the hose assembly shall be of adequate length for the intended use. Hose assemblies shall not be joined together to achieve the required length; and
- f) the hose assembly shall be inspected prior to installation in accordance with the manufacturer's instructions. The manufacturer's instructions shall address such items as:
  - i) soft spots, bulges or blisters in the hose;
  - ii) excessive abrasion exposing the hose reinforcement;
  - iii) cuts or cracks in the hose that expose or damage the reinforcement; and
  - iv) evidence of fitting movement or slippage with respect to the hose.

## 6 Tests

### 6.1 Applicability

The tests required to be carried out are indicated in [Table 1](#).

**Table 1 — Applicable tests**

Test	Applicable	Test procedure as required by ISO 15500-2	Specific test requirements of this document
Hydrostatic strength	X	X	X (see <a href="#">6.2</a> )
Leakage	X	X	
Excess torque resistance	X <sup>a</sup>	X	
Bending moment			
Continued operation	X	X	X (see <a href="#">6.3</a> )
Corrosion resistance	X	X	
Oxygen ageing	X	X	
Ozone ageing	X	X	
Heat ageing	X	X	
Automotive fluids	X		X (see <a href="#">6.8</a> )
Electrical over-voltages			
Non-metallic material immersion	X	X	
Vibration resistance	X	X	X (see <a href="#">6.10</a> )
Brass material compatibility	X	X	
Bending	X		X (see <a href="#">6.4</a> )
Pull off	X		X (see <a href="#">6.5</a> )
Electrical conductivity	X		X (see <a href="#">6.6</a> )
Permeability	X		X (see <a href="#">6.7</a> )
<sup>a</sup> Applicable to the fittings.			

### 6.2 Hydrostatic strength

Test the flexible fuel line according to the procedure for testing hydrostatic strength specified in ISO 15500-2. The test pressure shall be four times the specified working pressure.

NOTE The higher hydrostatic test pressure for the flexible fuel line compared to the other components in the other parts of the ISO 15500 series is due to the necessary provisions to cope for eventual damage or abrasions under normal operation.

### 6.3 Continued operation

Test high-pressure flexible fuel lines in accordance with the procedure for testing continued operation given in ISO 15500-2, for a total of 20 000 cycles and low pressure flexible lines for a total of 100 000 cycles.

Following cycling testing, perform the leak test as specified in ISO 15500-2, then the hydrostatic test in accordance with 6.2.


### 6.4 Bending

Test the flexible fuel line using a suitable length of flexible fuel line with no end fittings according to the following procedure and acceptance criteria.

- a) Carefully bend the flexible fuel line and place it in a fixture as shown in Figure 1.
- b) After the flexible fuel line has been left in this position for 5 min, insert into one end of the flexible fuel line a steel ball having a diameter equal to half of the nominal inside diameter of the flexible fuel line.

The fuel line shall not kink and the ball shall pass freely from one end of the flexible fuel line to the other.

Dimension in millimetres

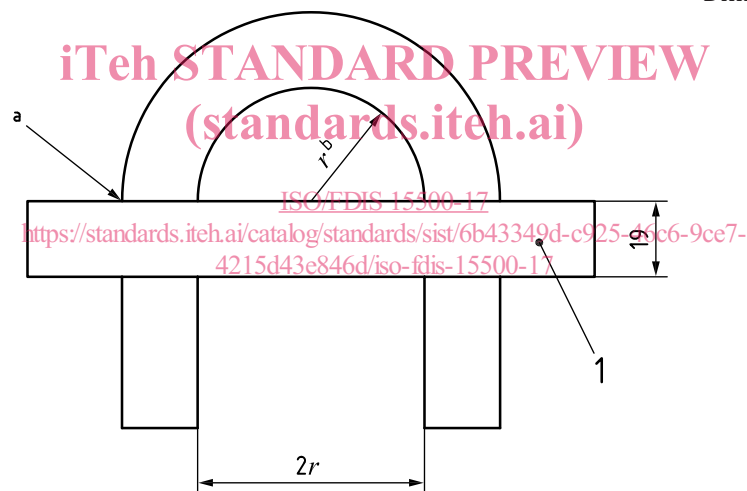

#### Key

- 1 board
- a Hole size as necessary to fit flexible fuel line outside diameter.
- b  $r = 10$  times the nominal flexible fuel line inside diameter, or the flexible fuel line manufacturer's specified minimum bend radius, whichever is less.

Figure 1 — Bending test

### 6.5 Pull off

Test the flexible fuel line, attached to its fitting or fittings and coupled to its mating part or parts, according to the following procedure and acceptance criterion. Secure the subject specimen in an appropriate test fixture, then statically apply a tensile load along the flexible fuel line axis at a maximum rate of 250 N/min until the flexible fuel line separates from its fitting.