



Designation: ~~D7321-08~~ Designation: D7321 - 11

Standard Test Method for Test Method for Particulate Contamination of Biodiesel B100 Blend Stock Biodiesel Esters and Biodiesel Blends by Laboratory Filtration¹

This standard is issued under the fixed designation D7321; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This test method covers the determination of the mass of particulate contamination in B100 biodiesel in accordance with Specification D6751 and BXX blends that are prepared against all No. 1 and No. 2 grade fuels allowed within Specifications D396, ~~and D975, D2880, and D3699.~~

NOTE 1—Middle distillate fuels with flash points less than 38°C have been ignited by discharges of static electricity when the fuels have been filtered through inadequately bonded or grounded glass fiber filter systems. See Guide D4865 for a more detailed discussion of static electricity formation and discharge.

~~1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.~~

1.2 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.3 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

2. Referenced Documents

2.1 ASTM Standards:²

D396 Specification for Fuel Oils

D975 Specification for Diesel Fuel Oils

D1193 Specification for Reagent Water ~~D2880 Specification for Gas Turbine Fuel Oils~~

~~D3699 Specification for Kerosene~~

D4057 Practice for Manual Sampling of Petroleum and Petroleum Products

D4865 Guide for Generation and Dissipation of Static Electricity in Petroleum Fuel Systems ~~D5452 Test Method for Particulate~~

~~Contamination in Aviation Fuels by Laboratory Filtration~~

D6751 Specification for Biodiesel Fuel Blend Stock (B100) for Middle Distillate Fuels

3. Terminology

3.1 Definitions:

3.1.1 *biodiesel, n*—fuel comprised of mono-alkyl esters of long chain fatty acids derived from vegetable oils or animal fats, designated B100.

3.1.2 *biodiesel blend, BXX, n*—blend of biodiesel fuel with petroleum based biodiesel fuel.

3.1.3 *bond, v*—to connect two parts of a system electrically by means of a conductive wire to eliminate voltage differences.

3.1.4 *ground, v*—to connect electrically with earth.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *control glass fiber filter, n*—~~lower of the two stacked glass fiber filters used in this test method.~~

¹ This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.14 on Stability and Cleanliness of Liquid Fuels.

Current edition approved March 15, 2008. Published April 2008. DOI: 10.1520/D7321-08.

Current edition approved Jan. 1, 2011. Published March 2011. Originally approved in 2008. Last previous edition approved in 2008 as D7321-08. DOI: 10.1520/D7321-11.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard.

3.2.2 *filtered flushing fluids, n*—either of two solvents, heptane or 2,2,4-trimethylpentane, filtered through a nominal 0.45 μm filter:

3.2.3 *any of three solvents, methanol, propan-2-ol (isopropanol), or 2,2,4-trimethylpentane, filtered through a nominal 0.45 μm filter.*

3.2.2 *test glass fiber filter, n*—upper of the two stacked glass fiber filters used in this test method.—glass fiber filter used in this test method.

4. Summary of Test Method

4.1 B100 Biodiesel Blend Stock Filtration:

4.1.1 A measured volume of about 400 mL of biodiesel ester (B100) is vacuum filtered through ~~two~~ one 0.7 μm glass fiber filters (a test filter and a control filter). ~~filter.~~ When the contamination is high or of a nature that induces slow filtration rates, two or more filtrations using a fresh filter set consisting of test and control filters ~~filter~~ each time may be required to complete filtration in a reasonable time.

4.1.2 After the filtration has been completed, the test filter ~~and control filters are~~ is washed with solvent, dried, and weighed. The particulate contamination level is determined by subtracting the ~~mass gain from the control filter~~ blank filter mass before filtration from the mass gained by the test filter, and is reported in units of g/m^3 or its equivalent in mg/L .

4.2 BXX Biodiesel Blend Filtration:

4.2.1 A measured volume of about 800 mL of biodiesel blend (BXX) is vacuum filtered through ~~two~~ one 0.7 μm glass fiber filters (a test filter and a control filter). ~~filter.~~ When the contamination is high or of a nature that induces slow filtration rates, two or more filtrations using a fresh filter set consisting of test and control filters each time may be required to complete filtration in a reasonable time.

4.2.2 After the filtration has been completed, the test filter ~~and control filters are~~ is washed with solvent, dried, and weighed. The particulate contamination level is determined by subtracting the mass gain from the control filter ~~from the mass gained by the test filter,~~ and is reported in units of g/m^3 or its equivalent in mg/L .

5. Significance and Use

5.1 The mass of particulates present in a fuel is a significant factor, along with the size and nature of the individual particles, in the rapidity with which fuel system filters and other small orifices in fuel systems can become plugged. This test method provides a means of assessing the mass of particulates present in a fuel sample.

5.2 The test method can be used in specifications and purchase documents as a means of controlling particulate contamination levels in the fuels purchased.

6. Apparatus

6.1 *Filtration System*—Arrange the following components as shown in Fig. 1.

6.1.1 *Funnel and Funnel Base*, with filter support for a 47-mm diameter glass fiber, and locking ring or spring action clip.

6.1.2 *Ground/Bond Wire*, 0.912-2.59 mm (No. 10 through No. 19) bare stranded flexible, stainless steel, or copper installed in the flasks and grounded as shown in Fig. 1.

NOTE 2—The electrical bonding apparatus described in Test Method D5452- 2—The electrical bonding apparatus shown in Fig. 1 or other suitable means of electrical grounding that ensure safe operation of the filtration apparatus and flask can be used. If the filtrate is to be subsequently tested for stability, it is advisable not to use copper since copper ions catalyze gum formation during the stability test.

6.1.3 *Receiving Flask*, 1.5 L or larger borosilicate glass vacuum filter flask, into which the filtration apparatus fits, equipped with a sidearm to connect to the safety flask.

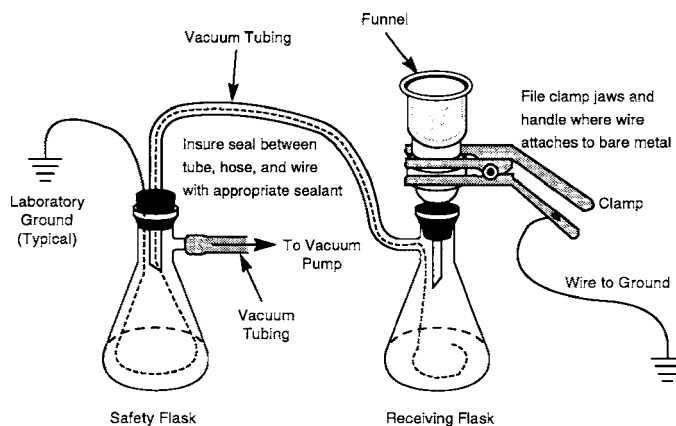


FIG. 1 Schematic of Filtration System

6.1.4 *Safety Flask*, 1.5 L or larger borosilicate glass vacuum filter flask equipped with a sidearm to connect the vacuum system. A fuel and solvent resistance rubber hose through which the grounding wire passes shall connect the sidearm of the receiving flask to the tube passing through the rubber stopper in the top of the safety flask.

6.1.5 *Vacuum System*, either a water aspirated or a mechanical vacuum pump may be used if capable of producing a vacuum of 1 to 100 kPa below atmospheric pressure when measured at the receiving flask.

6.2 *Other Apparatus*:

6.2.1 *Air Ionizer*, if used for the balance case. Air ionizers if used should be replaced annually.

NOTE 3—When using a solid-pan balance, the air ionizer may be omitted provided that, when weighing a glass fiber filter, it is placed on the pan so that no part protrudes over the edge of the pan.

6.2.2 *Analytical Balance*, single- or double-pan, with the precision standard deviation of 0.07 mg or less.

6.2.3 *Crucible Tongs*, for handling clean sample container lids.

6.2.4 *Drying Oven*, naturally convected (without fan-assisted air circulation), controlling to $90 \pm 5^\circ\text{C}$.

6.2.5 *Flushing Fluid Dispenser*, an apparatus for dispensing flushing fluid through a nominal 0.45 μm filter.

6.2.6 *Forceps*, approximately 12-cm long, flat-bladed, with non-serrated, non-pointed tips.

6.2.7 *Graduated Cylinders*, to contain at least 1 L of fluid and marked at 10-mL intervals. For samples that filter slowly, 100-mL graduated cylinders may be required.

6.2.8 *Petri Dishes*, approximately 12.5 cm in diameter, with removable glass supports for glass fiber filters.

NOTE 4—Small watch glasses, approximately 5 to 7 cm in diameter, have also been found suitable to support the glass fiber ~~filters~~-filter.

7. Reagents and Materials

7.1 *Purity of Reagents*—Reagent grade chemicals shall be used in all tests. Unless otherwise indicated, it is intended that all reagents shall conform to the specifications of the Committee on Analytical Reagents of the American Chemical Society, where such specifications are available.³ Other grades may be used, provided it is first ascertained that the reagent is of sufficient purity to permit its use without lessening the accuracy of the determination.

7.2 *Purity of Water*—Unless otherwise indicated, references to water mean reagent water as defined by Types I, II and III of Specification D1193.

7.3 *Flushing Fluids*:

7.3.1 ~~Heptane~~**Methanol**, (**Warning**— Flammable).

7.3.2 *2,2,4-trimethylpentane (isooctane)*, (**Warning**—Flammable).

7.4 *propan-2-ol (2-propanol; isopropyl alcohol)*, (**Warning**—Flammable).

7.5 *Liquid or Powder Detergent*, water-soluble, for cleaning glassware.

7.6 *Test Glass Fiber ~~Filters~~Filter*, plain, 47-mm diameter, nominal pore size 0.7- μm .

7.7 *Control Glass Fiber Filters*, (see Note 7), 47-mm diameter, nominal pore size 0.7- μm .

~~7.7.1 Glass fiber filters with a grid imprinted on their surface may be used as control glass fiber filters for identification.~~

~~7.8 Protective Cover~~, polyethylene film or clean aluminum foil.

8. Sampling

8.1 *Sampling for Procedure for Biodiesel Blend Stock (B100)*:

8.1.1 The sample container should be 500 mL (± 0.15 L) in volume and have a screw-on cap with an inert liner. Glass containers are preferred to facilitate a visual inspection of the contents and the container before and after filling. Glass containers also allow for visual inspection of the container, after the sample is emptied, to confirm complete rinsing of the container. Epoxy-lined sample cans, polytetrafluoroethylene (PTFE) bottles, and high density linear polyethylene bottles have also been found suitable as sample containers, but they are less desirable since visual inspection of the interior of the container is more difficult.

8.1.1.1 It is imperative that the *entire* contents of the sample container are filtered during the B100 filtration. This includes not only all of the fuel but also all rinsings of the interior of the container with flushing fluid. Because of this, take care to protect the sample from any external contamination.

8.1.2 If it is not possible to sample in a 500 mL bottle, or the sample has already been received in a 1 L bottle, follow 8.1.2.1.

8.1.2.1 Vigorously shake the sample for 1 min, and transfer 400 mL to a clean fresh 500 mL (± 0.15 L) bottle. If a clean fresh 500 mL (± 0.15 L) bottle is not available, use a clean fresh 1 L (± 0.15 L) bottle.

8.1.3 Precautions to avoid sample contamination shall include selection of an appropriate sampling point. Samples should preferentially be obtained dynamically from a sampling loop in a distribution line, or from the flushing line of a field sampling kit. Ensure that the line to be sampled is flushed with fuel before taking the sample.

8.1.3.1 Where it is desirable or only possible to obtain samples from static storage, follow the procedures given in Practice D4057 or equivalent, taking precautions for cleanliness of all equipment used. Ensure that the sample has not passed through

³ *Reagent Chemicals, American Chemical Society Specifications*, American Chemical Society, Washington, DC. For suggestions on the testing of reagents not listed by the American Chemical Society, see *Analar Standards for Laboratory Chemicals*, BDH Ltd., Poole, Dorset, U.K., and the *United States Pharmacopeia and National Formulary*, U.S. Pharmacopeial Convention, Inc. (USPC), Rockville, MD.