



Designation: D2594 – 04 (Reapproved 2008)^{e2}

Standard Test Method for Stretch Properties of Knitted Fabrics Having Low Power¹

This standard is issued under the fixed designation D2594; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

^{e1} NOTE—Editorial changes were made in August 2008.

^{e2} NOTE—In 12.2.2, 2 h recovery was corrected to 1 h editorially in April 2011. Also, in 7.3, the course-wise dimension of 500 was corrected editorially to 398 in April 2011.

1. Scope

1.1 This test method covers the measurement of fabric stretch and fabric growth of knitted fabrics intended for applications requiring low-power stretch properties.

1.2 This test method includes procedures for fabric growth and stretch and can be used individually when required by individual specifications.

1.3 This test method is not applicable to fabrics intended for support or other applications requiring high-power stretch properties.

NOTE 1—For information on testing high-power and woven stretch fabrics, refer to Test Methods D3107 and D6614.

1.4 The values stated in either SI or inch-pound units are to be regarded separately as the standard. Within the text, the inch-pound units are shown in parentheses. The values stated in each system are not exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in nonconformance with the specification.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D123 Terminology Relating to Textiles

D1776 Practice for Conditioning and Testing Textiles

D2904 Practice for Interlaboratory Testing of a Textile Test Method that Produces Normally Distributed Data

D2906 Practice for Statements on Precision and Bias for Textiles³

D3107 Test Methods for Stretch Properties of Fabrics Woven from Stretch Yarns

D4849 Terminology Related to Yarns and Fibers

D4850 Terminology Relating to Fabrics and Fabric Test Methods

D6614 Test Method for Stretch Properties of Textile Fabrics – CRE Method

3. Terminology

3.1 *Definitions:*

3.1.1 For definition of textile terms used in this test method: bench marks, refer to Terminology D4849.

3.1.2 For definitions of textile terms used in this test method: fabric growth; fabric stretch; low-power stretch and tension, refer to Terminology D4850.

3.1.3 For definitions of other textile terms used in this test method, refer to Terminology D123.

4. Summary of Test Method

4.1 *Fabric Growth*—Bench marks of a known distance are made on a fabric specimen. A specified tension is applied to a fabric specimen by a prescribed cycling technique. The tension is removed and after several specific recovery times under zero tension, the distance between the bench marks is remeasured after each time interval. The fabric growth is calculated from the length difference between the bench marks prior to application of the tension and after each respective recovery time interval.

4.2 *Fabric Stretch*—Bench marks of a known distance are made on a fabric specimen. A specified tension is applied to a fabric specimen by a prescribed cycling technique and the resulting distance between the bench marks measured. The fabric stretch is calculated from the length difference between

¹ This test method is under the jurisdiction of ASTM Committee D13 on Textiles and is the direct responsibility of Subcommittee D13.59 on Fabric Test Methods, General.

Current edition approved July 1, 2008. Published August 2008. Originally approved in 1969. Discontinued November 1997 and reinstated as D2594 – 99. Last previous edition approved in 2004 as D2594 – 04. DOI: 10.1520/D2594-04R08E02.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Withdrawn. The last approved version of this historical standard is referenced on www.astm.org.

the bench marks prior to application of the tension and under while under the tension.

5. Significance and Use

5.1 This test method specifies test conditions for measuring the fabric growth and fabric stretch of knitted fabrics intended for use in swimwear, anchored slacks, and other form-fitting apparel (also commonly known as semi-support apparel) applications, as well as test conditions for measuring the fabric growth of knitted fabrics intended for use in sportswear and other loose-fitting apparel (also commonly known as comfort stretch apparel) applications. The applicability of this test method to the measurement of fabric growth and fabric stretch of knitted fabrics intended for use in slacks, sport coats, and suits has not been determined.

5.2 This test method is not recommended for acceptance testing of commercial shipment because the between-laboratory precision is known to be poor.

5.2.1 If there are differences of practical significance between reported test results for two laboratories (or more), comparative tests should be performed to determine if there is a statistical bias between them, using competent statistical assistance. As a minimum, ensure the test samples to be used are as homogeneous as possible, are drawn from the material from which the disparate test results are obtained, and are assigned randomly in equal numbers to each laboratory for testing. The test results from the two laboratories should be compared using a statistical test for unpaired data, at a probability level chosen prior to the testing series. If a bias is found, either its cause must be found and corrected, or future test results for that material must be adjusted in consideration of the known bias.

6. Apparatus

6.1 *Frame*⁴, suitable for supporting the hanger assembly illustrated in Fig. 1 and tension forces applied during testing.

⁴ For additional information on obtaining apparatus, equipment, or supplies that may be suitable for use in this standard, please visit the ASTM Manufacturers' Equipment Directory at www.astm.org.

6.2 *Hanger Assembly*⁴, consisting of hangers, hanger rods, and chain.

6.3 *Lightweight Rule*⁴, fitted with a pin hook at the zero point of the scale for attachment to the specimen, graduated either in units of percent of original gage length of 125 mm (5 in.) or in units of 1 mm ($\frac{1}{16}$ in.).

6.4 *Tensiometer or Weights*⁴, that can be attached to the bottom hanger of the hanger assembly, capable of providing total tensions of 2.27 kgf (5 lbf) and 4.54 kgf (10 lbf) to the specimen, $\pm 1\%$.

6.5 *Turnbuckle*⁴, or equivalent, having a length of 25 to 75 mm (1 to 3 in.).

6.6 *Sanforized Marker*, to establish bench marks on the specimen.

6.7 *Timer*, with increments of at least 1 min.

7. Sampling and Test Specs

7.1 *Primary Sampling Unit*—Consider rolls of fabric or fabric components of fabricated systems to be the primary sampling unit, as applicable.

7.2 *Laboratory Sampling Unit*—As a laboratory sampling unit take from rolls at least one full-width piece of fabric that is 2 m (2 yd) in length along the selvage (machine direction), after removing a first 1 mm (1 yd) length. For fabric components of fabricated systems use the entire system.

7.3 *Test Specimens*—From each laboratory sampling unit, cut 5 wale-wise (lengthwise) and 5 course-wise (widthwise) test specimens 125 ± 3 mm (5 ± 0.1 in.) by 398 ± 10 mm (15.5 ± 0.3 in.). Cut the long dimension of the wale-wise specimens parallel to the wale direction and the course-wise specimens parallel to the course direction. Take specimens representing a broad distribution from different positions diagonally across the width of the laboratory sampling unit. Consider the long direction as the direction of test. Label to maintain specimen identity.

7.3.1 For fabric widths 125 mm (5 in.) or more, take no specimen closer than 25 mm (1 in.) from the edges of the laboratory sampling unit.

7.3.2 For fabric widths less than 125 mm (5 in.), use the entire width of the laboratory sampling unit for specimens.

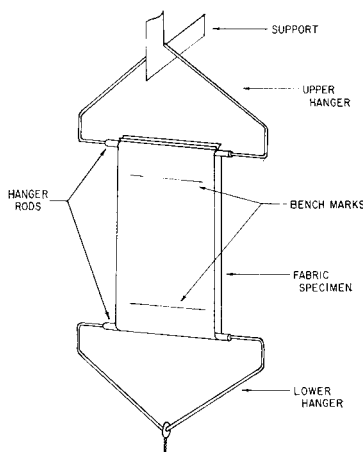


FIG. 1 Hanger Assembly