



~~Designation: A955/A955M-10a~~ Designation: A955/A955M – 11

Standard Specification for Deformed and Plain Stainless-Steel Bars for Concrete Reinforcement¹

This standard is issued under the fixed designation A955/A955M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This specification covers deformed and plain stainless-steel bars for concrete reinforcement in cut lengths and coils used in applications requiring resistance to corrosion or controlled magnetic permeability. The standard sizes and dimensions of deformed bars and their numerical designation shall be those listed in Table 1. The text of this specification references notes and footnotes which provide explanatory material. These notes and footnotes (excluding those in tables and figures) shall not be considered as requirements of the specification.

1.1.1 Supplementary requirement (S1) of an optional nature is provided. It shall apply only when specified by the purchaser. In order to obtain a controlled magnetic permeability product, steel conforming to Supplementary Requirement S1 should be ordered.

1.2 The chemical composition of the stainless steel alloy shall be selected for suitability to the application involved by agreement between the manufacturer and the purchaser. This is an important consideration in achieving the desired corrosion resistance or controlled magnetic permeability, or both, because these properties are not provided by all stainless steels.

NOTE 1—The alloys shown in Table 2 have found the most use in North America. Other alloys may also provide desired properties; consult with the manufacturer for stainless steel alloy properties and availability.

~~1.3~~ Bars are of three minimum yield strength levels, namely, 40 000 [280 MPa], 60 000 [420 MPa], and 75 000 psi [520 MPa], designated as Grade 40 [280], Grade 60 [420], and Grade 75 [520], respectively.

~~1.4~~

~~1.3~~ Requirements for the relative deformation area of three-sided deformed bars are contained in Annex A4.

~~1.4~~ Bars are of three minimum yield strength levels, namely, 40 000 [280 MPa], 60 000 [420 MPa], and 75 000 psi [520 MPa], designated as Grade 40 [280], Grade 60 [420], and Grade 75 [520], respectively.

~~1.5~~ Plain rounds in sizes up to and including 2 in. [50.8 mm] in diameter in coils or cut lengths, when ordered, shall be furnished under this specification in Grade 40 [280], Grade 60 [420], and Grade 75 [520], respectively. Bending properties, when required, shall be by agreement between the manufacturer and purchaser. Requirements providing for deformations and marking shall not be applicable to plain bars.

~~1.56~~ Weldability of most stainless steel compositions is generally good, however, pre-weld or post-weld procedures, or both, are necessary. Where material is to be welded, a welding procedure suitable for the chemical composition and intended use or service shall be used. Retesting of physical properties should be considered following welding procedures depending upon the steel composition and welding operation involved.

NOTE 2—It is recommended that the user consult the manufacturer for information available from the Nickel Development Institute (NIDI) (Toronto, Canada).

~~1.6~~ ~~This~~ ~~1.7~~ This specification is applicable for orders in either inch-pound units (as Specification A955) or in SI units (as Specification A955M).

~~1.7~~ ~~The~~ ~~1.8~~ The values stated in either inch-pound or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in nonconformance with the standard.

~~1.8~~ ~~1.9~~ This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

¹ This specification is under the jurisdiction of ASTM Committee A01 on Steel, Stainless Steel and Related Alloys and is the direct responsibility of Subcommittee A01.05 on Steel Reinforcement.

Current edition approved ~~Oct. April 1, 2010; 2011.~~ Published ~~November 2010; May 2011.~~ Originally approved in 1996. Last previous edition approved in 2010 as A955/A955M – 10a. DOI: 10.1520/A0955_A0955M-10A1.

*A Summary of Changes section appears at the end of this standard.

2. Referenced Documents

2.1 ASTM Standards:²

A6/A6M Specification for General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling

A276 Specification for Stainless Steel Bars and Shapes

A342/A342M Test Methods for Permeability of Feebly Magnetic Materials

A370 Test Methods and Definitions for Mechanical Testing of Steel Products ~~A484/A484M Specification for General Requirements for Stainless Steel Bars, Billets, and Forgings~~

A510 Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel

A510M Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel (Metric)

A700 Practices for Packaging, Marking, and Loading Methods for Steel Products for Shipment

A751 Test Methods, Practices, and Terminology for Chemical Analysis of Steel Products

C192/C192M Practice for Making and Curing Concrete Test Specimens in the Laboratory

E29 Practice for Using Significant Digits in Test Data to Determine Conformance with Specifications

G15 Terminology Relating to Corrosion and Corrosion Testing

2.2 U.S. Military Standard:³

MIL-STD-129 Marking for Shipment and Storage

2.3 U.S. Federal Standard:³

Fed. Std. No. 123 Marking for Shipment (Civil Agencies)

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.1.1 *deformations, n*—transverse protrusions on a deformed bar.

3.1.2 *deformed bar, n*—steel bar with protrusions; a bar that is intended for use as reinforcement in reinforced concrete construction.

3.1.2.1 *Discussion*—The surface of the bar is provided with lugs or protrusions that inhibit longitudinal movement of the bar relative to the concrete surrounding the bar in such construction. The lugs or protrusions conform to the provisions of this specification.

3.1.3 *plain bar, n*—steel bar without protrusions.

3.1.4 *relative deformation area, n*—the ratio of the deformation bearing area (projected deformation area normal to the bar axis) to the shearing area (nominal bar perimeter times the average spacing of the deformations).

3.1.5 *rib, n*—longitudinal protrusion on a deformed bar.

~~3.1.5~~

3.1.6 *stainless steel, n*—a steel that contains 11 % or more chromium.

3.1.7 *three-sided bar, n*—deformed steel bar with three rows of transverse deformations.

3.1.8 *two-sided bar, n*—deformed steel bar with two rows of transverse deformations.

4. Ordering Information

4.1 It shall be the responsibility of the purchaser to specify all requirements that are necessary for material ordered to this specification. Such requirements shall include but are not limited to the following:

4.1.1 Quantity (weight) [mass],

4.1.2 Name of material (deformed and plain stainless steel bars for concrete reinforcement),

4.1.3 Chemical composition (stainless steel alloy),

4.1.4 Heat treatment condition,

4.1.5 Size,

4.1.6 Cut lengths or coils,

4.1.7 Deformed or plain,

4.1.8 Grade (strength level),

4.1.9 Descaling method and finish,

4.1.10 Packaging (see Section 24),

4.1.11 Supplementary requirement (if desired), and

4.1.12 ASTM designation and year of issue.

5. Materials and Manufacture

5.1 The bars shall be rolled from properly identified heats of mold or strand cast steel.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from Standardization Documents Order Desk, DODSSP, Bldg. 4, Section D, 700 Robbins Ave., Philadelphia, PA 19111-5098, <http://www.dodssp.daps.mil>.



TABLE 1 Deformed Bar Designation Numbers, Nominal Weights [Masses], Nominal Dimensions, and Deformation Requirements

Bar Designation No.	Nominal Weight, lb/ft [Nominal Mass, kg/m] ^A		Nominal Dimensions ^B			Deformation Requirements, in. [mm]				Maximum Gap per Side ^C		
	400 Series; Duplex Alloys	300 Series	Diameter, in. [mm]	Cross-Sectional Area, in. ² [mm ²]	Perimeter, in. [mm]	Max	Average Spacing	Minimum Average Height	Two-Simultaneous Gages	Theroid of 12.5% of Nominal Perimeter Simulated Bar		
3 [10]	0.374 [0.556]	0.378 [0.562]	0.375 [9.5]	0.11 [71]	1.178 [29.9]		0.262 [6.7]	0.015 [0.38]	0.143 [3.6]	0.097 [2.5]		
4 [13]	0.679 [1.011]	0.686 [1.021]	0.500 [12.7]	0.20 [129]	1.571 [39.9]		0.350 [8.9]	0.020 [0.51]	0.191 [4.9]	0.129 [3.3]		
5 [16]	1.048 [1.559]	1.058 [1.575]	0.625 [15.9]	0.31 [199]	1.963 [49.9]		0.437 [11.1]	0.028 [0.71]	0.239 [6.1]	0.162 [4.1]		
6 [19]	1.495 [2.225]	1.511 [2.248]	0.750 [19.1]	0.44 [284]	2.356 [59.8]		0.525 [13.3]	0.038 [0.97]	0.286 [7.3]	0.194 [4.9]		
7 [22]	2.038 [3.032]	2.059 [3.064]	0.875 [22.2]	0.60 [367]	2.749 [69.8]		0.612 [15.5]	0.044 [1.12]	0.334 [8.5]	0.226 [5.8]		
8 [25]	2.685 [3.995]	2.713 [4.037]	1.000 [25.4]	0.79 [510]	3.142 [79.8]		0.700 [17.8]	0.050 [1.27]	0.383 [9.7]	0.259 [6.6]		
9 [29]	3.396 [5.053]	3.441 [5.106]	1.128 [28.7]	1.00 [645]	3.544 [90.0]		0.790 [20.1]	0.056 [1.42]	0.431 [10.9]	0.292 [7.4]		
10 [32]	4.312 [6.416]	4.358 [6.484]	1.270 [32.3]	1.27 [819]	3.990 [101.3]		0.889 [22.6]	0.064 [1.63]	0.487 [12.4]	0.329 [8.3]		
11 [36]	5.296 [7.880]	5.352 [7.964]	1.410 [35.8]	1.56 [1006]	4.430 [112.5]		0.987 [25.1]	0.071 [1.80]	0.540 [13.7]	0.365 [9.3]		
14 [43]	7.64 [11.37]	7.72 [11.49]	1.693 [43.0]	2.25 [1452]	5.32 [135.1]		1.185 [30.1]	0.085 [2.16]	0.648 [16.5]	0.438 [11.1]		
18 [57]	13.59 [20.22]	13.72 [20.43]	2.257 [57.3]	4.00 [2581]	7.09 [180.1]		1.58 [40.1]	0.102 [2.59]	0.864 [21.9]	0.584 [14.8]		

^A The 400 and Duplex-Alloy Series is based on a density of 489.59 lb/ft³ [7833.4 kg/m³]. The 300 Series is based on a density of 494.78 lb/ft³ [7916.5 kg/m³]. Density varies with alloy content which may result in a variation of several percent.

^B The nominal dimensions of a deformed bar are equivalent to those of a round bar having the same weight [mass] per foot [metre] as the deformed bar.

^C The maximum gap (measured as a chord) between the ends of the deformations shall not exceed 25%/n of the nominal perimeter of the bar, where n is the number of longitudinal gaps or longitudinal ribs around the perimeter of the bar.

TABLE 2 Chemical Requirements of Typical Alloys^A

UNS Designation	Type	Composition %								
		Carbon	Manganese	Phosphorus	Sulfur	Silicon	Chromium	Nickel	Molybdenum	Nitrogen
S24000	XM-29	0.08	11.50-14.50	0.060	0.030	1.00	17.00-19.00	2.25-3.75	0.20-0.40
S24100	XM-28	0.15	11.00-14.00	0.060	0.030	1.00	16.50-19.00	0.50-2.50	0.20-0.45
S30400	304	0.08	2.00	0.045	0.030	1.00	18.00-20.00	8.00-10.50	0.10
S31603	316L	0.03	2.00	0.045	0.030	1.00	16.00-18.00	10.00-14.00	2.00-3.00	0.10
S31653	316LN	0.03 max	2.00	0.045	0.030	1.00	16.00-18.00	10.00-14.00	2.00-3.00	0.10-0.16
S31803	0.03	2.00	0.030	0.020	1.00	21.00-23.00	4.50-6.50	2.50-3.50	0.08-0.20

^A Maximum, unless otherwise indicated.

5.2 Bars shall be furnished in one of the following heat treatment conditions, as shown in Specification A276, and as needed to meet the requirements of this specification.

- 5.2.1 Annealed (A).
- 5.2.2 Hot rolled (HR).
- 5.2.3 Strain hardened (B).

NOTE 3—The mechanical properties of the material result from the heat treat condition of the material. Any further heat treatment of the material may alter those properties and affect their ability to meet the specified strength level. No re-treatment should be imposed without retesting to the requirements of this specification.

6. Chemical Composition

6.1 The chemical analysis of each heat of steel shall be determined in accordance with Test Methods, Practices, and Terminology A751. ~~The manufacturer shall make the analysis on test samples taken preferably during the pouring of the heat. Such analysis shall meet the chemical composition requirements specified in Table 2 by the purchaser.~~

~~6.2 When specified by the purchaser, an analysis of the product shall be made by the manufacturer and shall conform to the analysis tolerances specified in Table 1 of Specification A484/A484M. The manufacturer shall make the analysis on test samples taken preferably during the pouring of the heat.~~

~~6.2 The chemical composition agreed to between manufacturer and purchaser shall conform to the requirements in Table 1 of Specification A276.~~

~~6.3 An analysis made by the purchaser from the finished product shall meet the specification tolerances of Specification A484/A484M.~~

7. Requirements for Deformations

7.1 Deformations shall be spaced along the bar at substantially uniform distances. The deformations on opposite all sides of the bar shall be similar in size, shape, and pattern.

7.2 The deformations shall be placed with respect to the axis of the bar so that the included angle is not less than 45°. Where the line of deformations forms an included angle with the axis of the bar of from 45 to 70° inclusive, the deformations on a two-sided bar shall alternately reverse in direction on each side or those on one side shall be reversed in direction from those on the opposite side. The deformations on three-sided bars shall reverse on one of the three sides (see Fig. 1). Where the line of deformation is over 70°, a reversal in direction is not required.

7.3 The average spacing or distance between deformations on each side of the bar shall not exceed seven tenths of the nominal diameter of the bar.

7.4 The overall length of deformations shall be such that the gap (measured as a chord) between the ends of the deformations shall not exceed ~~12½%–25 %/n~~, where *n* is the number of longitudinal gaps or longitudinal ribs, of the nominal perimeter of the bar. Where the ends of the deformations terminate in a longitudinal rib, the width of the longitudinal rib shall be considered as the gap between these ends. The summation of the gaps shall not exceed 25 % of the nominal perimeter of the bar. The nominal perimeter of the bar shall be 3.1416 times the nominal diameter.

7.5 The spacing, height, and gap of deformations shall conform to the requirements prescribed in Table 1.

8. Measurement of Deformations

8.1 The average spacing of deformations shall be determined by measuring the length of a minimum of ten spaces and dividing that length by the number of spaces included in the measurement. The measurement shall begin from a point on a deformation at the beginning of the first space to a corresponding point on a deformation after the last included space. Spacing measurements shall not be made over a bar area containing bar marking symbols.

8.2 The average height of deformations shall be determined from measurements made on not less than two typical deformations. Determinations shall be based on three measurements per deformation, one at the center of the overall length and the other two at the quarter points of the overall length.

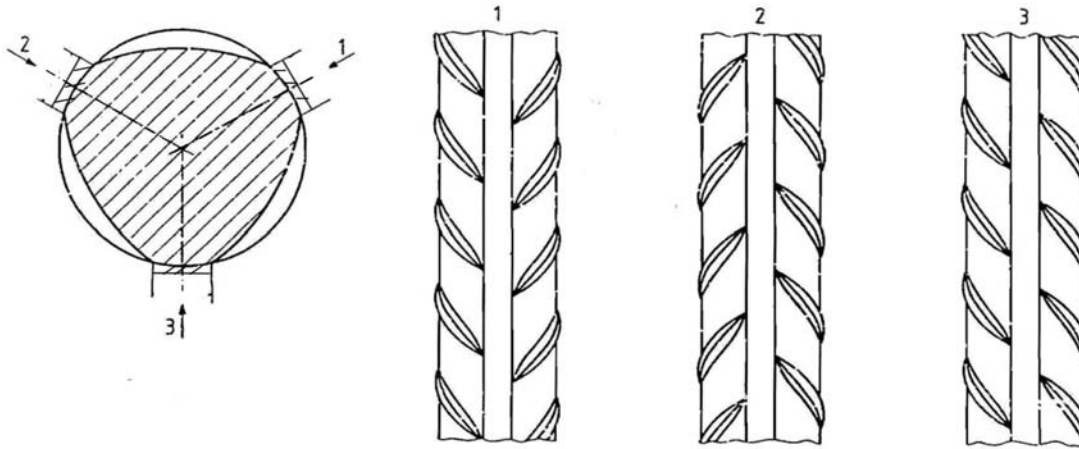


FIG. 1 Typical Three-Sided Deformed Bar

8.3 Insufficient height, insufficient circumferential coverage, or excessive spacing of deformations shall not constitute cause for rejection unless it has been clearly established by determinations on each lot (

8.3 For three-sided bars, the relative deformation area, R_d , shall meet the requirements of Annex A4.

8.4 Insufficient height, insufficient circumferential coverage, or excessive spacing of deformations shall not constitute cause for rejection unless it has been clearly established by determinations on each lot (Note 4) tested that typical deformation height, gap, or spacing does not conform to the minimum requirements prescribed in Section 7. No rejection shall be made on the basis of measurements if fewer than ten adjacent deformations on each side of the bar are measured.

NOTE 4—A lot, for this purpose, is defined as all the bars of one bar number and pattern of deformation contained in an individual shipping release or shipping order.

9. Tensile Requirements

9.1 The material, as represented by the test specimens, shall conform to the requirements for tensile properties prescribed in Table 3.

9.2 The yield strength shall be determined by the offset method (0.2 % offset), as described in Test Methods and Definitions A370. A second tensile test result shall also be required. In addition, the stress corresponding to a tensile strain of 0.0035 shall be a minimum of 60 000 psi [420 MPa] for Grade 60 [420] and a minimum of 75 000 psi [520 MPa] for Grade 75 [520]. The value of stress corresponding to a tensile strain of 0.0035 shall be reported in the test report (19.1.5).

9.3 When material is furnished in coils, the test specimen shall be taken from the coil and straightened prior to placing it in the jaws of the tensile test machine. Straightening of the test specimens shall be done carefully to avoid formation of local sharp bends and to minimize cold work. (See Note 5.)

9.3.1 Test specimens taken from post-fabricated material shall not be used to determine conformance to this specification.

NOTE 5—Insufficient straightening prior to attaching the extensometer can result in lower-than-actual yield strength readings. Multiple bending distortion from mechanical straightening and fabricating machines can lead to excessive cold work, resulting in higher magnetic permeability, higher yield strengths, lower elongation values, and a loss in deformation height.

9.4 The percentage of elongation shall be as prescribed in Table 3. When the actual percentage of elongation meets or exceeds 25 %, the bending requirements in Section 10 shall be waived.

10. Bending Requirements

10.1 The bend test specimen shall withstand being bent around a pin without cracking on the outside radius of the bent portion.

TABLE 3 Tensile Requirements

NOTE 1—Check with producer for availability of grades and sizes.

	Grade 40 [280]	Grade 60 [420]	Grade 75 [520]
Tensile strength, min, psi [MPa]	70 000 [500]	90 000 [620]	100 000 [690]
Yield strength, min, psi [MPa]	40 000 [280]	60 000 [420]	75 000 [520]
Elongation in 8 in. [200 mm], min, %			
Bar designation no.			
3, 4, 5 [10, 13, 16]	20	20	20
6 [19]	20	20	20
7, 8, 9, 10, 11, 14, 18 [22, 25, 29, 32, 36, 43, 57]		20	20

The requirements for degree of bending and sizes of pins are prescribed in Table 4.

10.2 The bend test shall be made on specimens of sufficient length to ensure free bending and with apparatus which provides the following:

10.2.1 Continuous and uniform application of force throughout the duration of the bending operation,

10.2.2 Unrestricted movement of the specimen at points of contact with the apparatus and bending around a pin free to rotate, and

10.2.3 Close wrapping of the specimen around the pin during the bending operation.

10.3 It is permissible to use more severe methods of bend testing, such as placing a specimen across two pins free to rotate and applying the bending force with a fixed pin. When failures occur under more severe methods, retests shall be permitted under the bend-test method prescribed in 10.2.

11. Hardness Requirements

11.1 Martensitic grades shall meet the minimum hardness requirements shown in Specification A276, or other referenced specifications.

12. Corrosion Resistance Requirements

12.1 The demonstration of corrosion resistance shall be by the recommended practice in Annex A1 or by agreement between the manufacturer and the purchaser.

12.2 Corrosion performance as demonstrated in Annex A1 shall be performed one time for each stainless steel alloy processed as reinforcement by each manufacturer. Corrosion performance for the alloy shall be redemonstrated if the processing method is significantly altered.

13. Magnetic Properties

13.1 Controlled magnetic permeability shall be specified by invoking Supplementary Requirement S1.

14. Permissible Variation in Weight [Mass]

14.1 Deformed reinforcing bars shall be evaluated on the basis of nominal weight [mass]. The weight [mass] determined using the measured weight [mass] of the test specimen and rounding in accordance with Practice E29, shall be at least 94 % of the applicable weight [mass] per unit prescribed in Table 1. In no case shall overweight [excess mass] of any deformed bar be the cause for rejection. Weight [mass] variation for plain rounds shall be computed on the basis of permissible variation in diameter. For plain rounds smaller than 3/8 in. [9.5 mm], use Specification A510 [Specification A510M]. For larger bars up to and including 2 in. [50.8 mm], use Specification A6/A6M.

14.2 The specified limit of variation shall be evaluated in accordance with Practice E29 (rounding method).

15. Finish

15.1 The bars shall be free of detrimental surface imperfections.

15.2 Seams, surface irregularities, or mill oxidation shall not be cause for rejection, provided the mass, dimensions, cross-sectional area, and tensile properties of a test specimen are not less than the requirements of this specification.

15.3 Surface imperfections other than those specified in 15.1 shall be considered detrimental when specimens containing such imperfections fail to conform to either tensile or bending requirements.

15.4 Unless otherwise specified by the purchaser, after rolling, the bars shall be pickled to remove mill scale and surface oxidation.

NOTE 6—Pickling has been shown to be needed for the corrosion resistance of most stainless steel reinforcement.

16. Number of Tests

16.1 For all bar sizes, one tension test, one bend test, if required (see 9.4), and one set of dimensional property tests including bar weight [mass] and spacing, height, and gap of deformations shall be made of each bar size rolled from each heat and of the same heat treatment condition.

TABLE 4 Bend Test Requirements

Bar Designation No.	Pin Diameter for Bend Test ^A		
	Grade 40 [280]	Grade 60 [420]	Grade 75 [520]
3, 4, 5 [10, 13, 16]	3½ <i>d</i> ^B	3½ <i>d</i>	3½ <i>d</i>
6 [19]	5 <i>d</i>	5 <i>d</i>	5 <i>d</i>
7, 8 [22, 25]	...	5 <i>d</i>	5 <i>d</i>
9, 10, 11 [29, 32, 36]	...	7 <i>d</i>	7 <i>d</i>
14, 18 [43, 57] (90°)	...	9 <i>d</i>	9 <i>d</i>

^A Test bends 180° unless noted otherwise.

^B *d* = nominal diameter of specimen.