

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
22733-2

ISO/TC 22/SC 33

Secretariat: DIN

Voting begins on:
2023-08-09

Voting terminates on:
2023-10-04

Road vehicles — Test method to evaluate the performance of autonomous emergency braking systems —

Part 2: Car to pedestrian

*Véhicules routiers — Méthode d'essai pour évaluer la performance
des systèmes automatiques de freinage d'urgence —*

Partie 2: Voiture à piéton

[ISO 22733-2](https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2)

<https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 22733-2:2023(E)

© ISO 2023

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 22733-2](https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2)

<https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

| | |
|---|-----------|
| Foreword | v |
| Introduction | vi |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Reference system and variables | 4 |
| 4.1 Coordinate system..... | 4 |
| 4.2 Lateral path errors..... | 5 |
| 4.3 Profiles for impact speed determination..... | 5 |
| 5 Variables to be measured | 6 |
| 6 Measuring equipment | 7 |
| 6.1 Description..... | 7 |
| 6.2 Transducer installation..... | 7 |
| 6.3 Calibration..... | 7 |
| 6.4 Data processing..... | 8 |
| 7 Test conditions | 8 |
| 7.1 General..... | 8 |
| 7.2 General data..... | 8 |
| 7.3 Test track..... | 8 |
| 7.4 Weather conditions..... | 8 |
| 7.5 Surroundings..... | 8 |
| 7.6 VUT..... | 8 |
| 7.6.1 General vehicle condition..... | 8 |
| 7.6.2 AEBS settings..... | 8 |
| 7.6.3 Deployable pedestrian protection systems..... | 8 |
| 7.6.4 Tyres..... | 8 |
| 7.6.5 Braking system..... | 9 |
| 7.6.6 Other influencing system..... | 9 |
| 7.6.7 Loading conditions..... | 9 |
| 8 Test procedures | 9 |
| 8.1 Test preparation..... | 9 |
| 8.1.1 Brake conditioning..... | 9 |
| 8.1.2 Tyre conditioning..... | 9 |
| 8.2 Test scenarios..... | 9 |
| 8.3 Test conduct..... | 14 |
| 8.4 Test execution..... | 14 |
| 8.4.1 Speeds..... | 14 |
| 8.4.2 Validity criteria..... | 15 |
| 8.4.3 End of test conditions..... | 15 |
| 9 Performance metrics | 15 |
| 9.1 Performance metrics for test until collision..... | 15 |
| 9.1.1 Speed of VUT (V_{VUT}) and speed of VUT at which collision is last avoided (V_{VUT}) _{cla} | 16 |
| 9.1.2 Impact speed of VUT at which collision first occurs: V_{IMPACT} | 16 |
| 9.1.3 Activation time of AEBS (T_{AEB}) and activation time of AEBS at which collision is last avoided (T_{AEB}) _{cla} | 16 |
| 9.1.4 Activation time of FCW (T_{FCW}) and activation time of FCW at which collision is last avoided (T_{FCW}) _{cla} | 16 |
| 9.1.5 Mean longitudinal acceleration of the VUT (A_{VUT}) and mean longitudinal acceleration of the VUT at which collision is last avoided (A_{VUT}) _{cla} | 16 |

| | | |
|-------|---|-----------|
| 9.1.6 | Maximum yaw rate of the VUT ($\dot{\psi}_{VUT}$) _{max} and maximum yaw rate of the VUT at which collision is last avoided ($\dot{\psi}_{VUT}$) _{max,cla} | 16 |
| 9.1.7 | Lateral path error of the VUT (Y_{VUT}) and lateral path error of the VUT at which collision is last avoided (Y_{VUT}) _{cla} | 16 |
| 9.1.8 | Maximum steering wheel velocity of VUT ($\dot{\Omega}_{VUT}$) _{max} and maximum steering wheel velocity at which collision is last avoided ($\dot{\Omega}_{VUT}$) _{max,cla} | 16 |
| 9.2 | Performance metrics for test until the designated maximum speed where no collision occurs..... | 17 |
| 9.2.1 | Speed of VUT (V_{VUT}) until the designated maximum speed (V_{VUT}) _{ds} | 17 |
| 9.2.2 | Activation time of AEBS (T_{AEB}) and activation time of AEBS at the designated maximum speed (T_{AEB}) _{dms} | 17 |
| 9.2.3 | Activation time of FCW (T_{FCW}) and activation time of FCW at the designated maximum speed (T_{FCW}) _{dms} | 17 |
| 9.2.4 | Mean longitudinal acceleration of the VUT (A_{VUT}) and mean longitudinal acceleration of the VUT at the designated maximum speed (A_{VUT}) _{dms} | 17 |
| 9.2.5 | Maximum yaw rate of the VUT ($\dot{\psi}_{VUT}$) _{max} and maximum yaw rate of the VUT at the designated speed ($\dot{\psi}_{VUT}$) _{max,dms} | 18 |
| 9.2.6 | Lateral offset of the VUT (Y_{VUT}) and lateral offset of the VUT at the designated maximum speed (Y_{VUT}) _{dms} | 18 |
| 9.2.7 | Maximum steering wheel velocity of VUT ($\dot{\Omega}_{VUT}$) _{max} and maximum steering wheel velocity at the designated maximum speed ($\dot{\Omega}_{VUT}$) _{max,dms} | 18 |
| 9.3 | Performance metrics for test until the designated maximum speed where collision occurs..... | 18 |
| 9.3.1 | Speed of VUT (V_{VUT}) and speed of VUT at which collision is last avoided (V_{VUT}) _{cla} | 19 |
| 9.3.2 | Impact speed of VUT at which collision first occurs: V_{IMPACT} | 19 |
| 9.3.3 | Activation time of AEBS (T_{AEB}) and activation time of AEBS at which collision is last avoided (T_{AEB}) _{cla} | 19 |
| 9.3.4 | Activation time of FCW (T_{FCW}) and activation time of FCW at which collision is last avoided (T_{FCW}) _{cla} | 19 |
| 9.3.5 | Mean longitudinal acceleration of the VUT (A_{VUT}) and mean longitudinal acceleration of the VUT at which collision is last avoided (A_{VUT}) _{cla} | 19 |
| 9.3.6 | Maximum yaw rate of the VUT ($\dot{\psi}_{VUT}$) _{max} and maximum yaw rate of the VUT at which collision is last avoided: ($\dot{\psi}_{VUT}$) _{max,cla} | 19 |
| 9.3.7 | Lateral offset of the VUT (Y_{VUT}) and lateral offset of the VUT at which collision is last avoided (Y_{VUT}) _{cla} | 19 |
| 9.3.8 | Maximum steering wheel velocity of VUT ($\dot{\Omega}_{VUT}$) _{max} and maximum steering wheel velocity at which collision is last avoided ($\dot{\Omega}_{VUT}$) _{max,cla} | 19 |
| | Bibliography | 21 |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 33, *Vehicle dynamics, chassis components and driving automation systems testing*.

A list of all parts in the ISO 22733 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The capacity to avoid or mitigate a collision during -potential accident - is an important part of the performance of an autonomous braking system fitted in a road vehicle. This document is intended to assess performance of an autonomous braking under defined test scenario only.

NOTE Moreover, insufficient knowledge is available concerning the relationship between overall vehicle dynamic properties and accident avoidance. A substantial amount of work is necessary to acquire sufficient and reliable data on the correlation between accident avoidance and vehicle dynamic properties in general and the results of these tests in particular.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 22733-2](https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2)

<https://standards.iteh.ai/catalog/standards/sist/e487b300-27fc-472d-ab63-93a3a527d475/iso-22733-2>

Road vehicles — Test method to evaluate the performance of autonomous emergency braking systems —

Part 2: Car to pedestrian

1 Scope

This document specifies test methods to evaluate performance of the autonomous emergency braking system (AEBS) in car to pedestrian collision situations. Forward collision warning system (FCWS) is part of AEBS when it provides warning before braking intervention.

Vehicle to pedestrian accidents occur when a vehicle under test (VUT) drives in straight line and either a pedestrian walks longitudinal on the same road or the pedestrian is approaching perpendicular the road.

A system requiring a driver intervention is not in scope of the document.

NOTE Depending on accidentology only a part of the scenarios can be used for an evaluation of performance.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8855, *Road vehicles — Vehicle dynamics and road-holding ability — Vocabulary*

ISO 15037-1:2019, *Road vehicles — Vehicle dynamics test methods — Part 1: General conditions for passenger cars*

ISO 22733-1:2022, *Road vehicles — Test method to evaluate the performance of autonomous emergency braking systems — Part 1: Car-to-car*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8855 and ISO 15037-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

AEB

autonomous emergency braking

braking applied automatically by the vehicle in response to the detection of a likely collision to reduce the vehicle speed and potentially avoid the collision

Note 1 to entry: For a complete definition refer to ISO 22839.

3.2

CPFA-50

car-to-pedestrian farside adult 50 %

collision in which a vehicle travels forwards towards an adult pedestrian crossing its path running from the farside and the frontal structure of the vehicle strikes the pedestrian at 50 % of the vehicle's width when no braking action is applied

[SOURCE: Reference [4], Clause 2]

3.3

CPNA-25

car-to-pedestrian nearside adult 25 %

collision in which a vehicle travels forwards towards an adult pedestrian crossing its path walking from the nearside and the frontal structure of the vehicle strikes the pedestrian at 25 % of the vehicle's width when no braking action is applied

[SOURCE: Reference [4], Clause 2]

3.4

CPNA-75

car-to-pedestrian nearside adult 75 %

collision in which a vehicle travels forwards towards an adult pedestrian crossing its path walking from the nearside and the frontal structure of the vehicle strikes the pedestrian at 75 % of the vehicle's width when no braking action is applied

[SOURCE: Reference [4], Clause 2]

3.5

CPNC-50

car-to-pedestrian nearside child 50 %

collision in which a vehicle travels forwards towards a child pedestrian crossing its path running from behind and obstruction from the nearside and the frontal structure of the vehicle strikes the pedestrian at 50 % of the vehicle's width when no braking action is applied

[SOURCE: Reference [4], Clause 2]

3.6

CPLA-25

car-to-pedestrian longitudinal adult 25 %

collision in which a vehicle travels forwards towards an adult pedestrian walking in the same direction in front of the vehicle where the vehicle strikes the pedestrian at 25 % of the vehicle's width when no braking action is applied or an evasive steering action is initiated after a *forward collision warning (FCW)* (3.8)

[SOURCE: Reference [4], Clause 2]

3.7

CPLA-50

car-to-pedestrian longitudinal adult 50 %

collision in which a vehicle travels forwards towards an adult pedestrian walking in the same direction in front of the vehicle where the vehicle strikes the pedestrian at 50 % of the vehicle's width when no braking action is applied

[SOURCE: Reference [4], Clause 2]

3.8

FCW

forward collision warning

audio-visual warning provided automatically by the vehicle in response to the detection of a likely collision to alert the driver

3.9**PTa**

pedestrian target adult

test device representing an adult pedestrian used to test active safety systems

[SOURCE: ISO 19206-2:2018, 3.2, modified — "Adult" has been added to the term and the definition.]

3.10**PTc**

pedestrian target child

test device representing a child pedestrian used to test active safety systems


[SOURCE: ISO 19206-2:2018, 3.2, modified — "Child" has been added to the term and the definition.]

3.11**TTC**

time to collision

remaining time before the *vehicle under test (VUT)* (3.15) strikes the pedestrian target (PT), assuming that the VUT and PT would continue to travel with the speed it is travelling**3.12** **T_{AEB}** time where the *autonomous emergency braking (AEB)* (3.1) system activatesNote 1 to entry: Activation time is determined by identifying the last data point where the filtered acceleration signal is below $-1,0 \text{ m/s}^2$, and then going back to the point in time where the acceleration first crossed $-0,3 \text{ m/s}^2$.**3.13** **T_{FCW}** time where the audible warning of the *forward collision warning (FCW)* (3.8) starts

Note 1 to entry: The starting point is determined by audible recognition or video analysis.

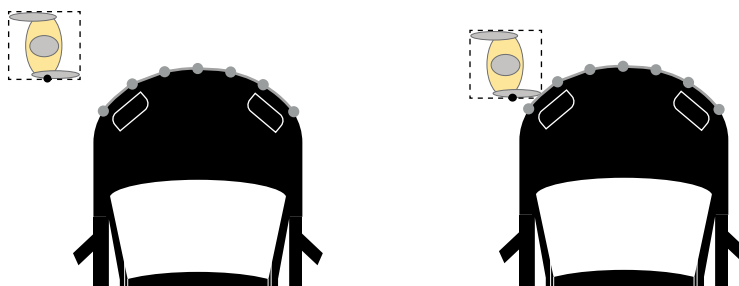3.14 **T_{impact}** speed at which the profiled line around the front end of the *vehicle under test (VUT)* (3.15) coincides with the square box around the *pedestrian target adult (PTa)* (3.9), *pedestrian target child (PTc)* (3.10) as shown in the [Figure 1](#)**Figure 1 — Definition of impact****3.15****VUT**

vehicle under test

vehicle tested according to this document with a pre-crash collision mitigation or avoidance system on board

3.16 vehicle width

widest point of the vehicle ignoring the rear-view mirrors, side marker lamps, tyre pressure indicators, direction indicator lamps, position lamps, flexible mud-guards and the deflected part of the tyre side-walls immediately above the point of contact with the ground

4 Reference system and variables

4.1 Coordinate system

For VUT and PT use the convention specified in ISO 8855 in which the x-axis points towards the front of the vehicle, the y-axis towards the left and the z-axis upwards (right hand system), with the origin at the most forward point on the centreline of the VUT for dynamic data measurements as shown in [Figure 2](#).


Viewed from the origin, roll, pitch and yaw rotate clockwise around the x, y and z axes respectively. Longitudinal refers to the component of the measurement along the x-axis, lateral refers the component along the y-axis and vertical refers the component along the z-axis.

This reference system should be used for both left (LHD) and right-hand drive (RHD) vehicles tested.

The nearside is swapped as per LHD and RHD vehicles. [Figure 2](#) shows the near and farside of the vehicle for an LHD vehicle.

The reference earth frame according to [ISO 8855:2011, 2.8](#) is defined as:

- X_E axis: intended straight line path projected on the ground to front;
- Y_E axis: perpendicular to X axis on the ground to left;
- Z_E axis: perpendicular to the ground to the top.

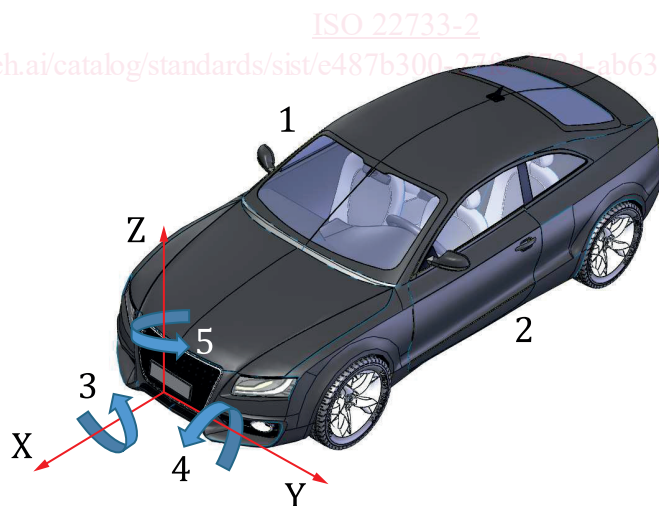

Key

| | | | |
|---|--------------------|---|--------------------|
| X | longitudinal(X) | Y | lateral(Y) |
| Z | vertical(Z) | 1 | NEAR SIDE |
| 2 | FAR SIDE | 3 | roll (φ) |
| 4 | pitch (θ) | 5 | yaw (ψ) |

Figure 2 — Coordinate system and notation (LHD and RHD), nearside and farside for LHD vehicle