

INTERNATIONAL
STANDARD

ISO
3203

First edition
1993-12-15

Aerospace — Bolts, normal bihexagonal head, normal or pitch diameter shank, long length MJ threads, metallic material, coated or uncoated, strength classes less than or equal to 1 100 MPa — Dimensions

ISO 3203:1993
Aéronautique et espace — Vis à tête bihexagonale normale, avec tige normale ou de diamètre égal au diamètre sur flancs, et filetage MJ long, en matériau métallique, revêtues ou non revêtues, des classes de résistance inférieures ou égales à 1 100 MPa — Dimensions



Reference number
ISO 3203:1993(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3203 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Sub-Committee SC 4, *Aerospace fastener systems*.

[ISO 3203:1993](https://standards.iteh.ai/catalog/standards/sist/de80121d-94fd-4580-80e6-436f261fb6fb/iso-3203-1993)

<https://standards.iteh.ai/catalog/standards/sist/de80121d-94fd-4580-80e6-436f261fb6fb/iso-3203-1993>

© ISO 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Aerospace — Bolts, normal bihexagonal head, normal or pitch diameter shank, long length MJ threads, metallic material, coated or uncoated, strength classes less than or equal to 1 100 MPa — Dimensions

1 Scope

This International Standard specifies the dimensions of normal bihexagonal head bolts, with normal or pitch diameter shank, and long length MJ threads, in metallic material, coated or uncoated, with strength classes less than or equal to 1 100 MPa.

It is intended for the drawing up of aerospace product standards.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below.

Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts.*


ISO 3353:1992, *Aerospace — Rolled threads for bolts — Lead and runout requirements.*

ISO 4095:1978, *Fasteners for aerospace construction — Bi-hexagonal wrenching configuration.*

ISO 5855-2:1988, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts.*

3 Configuration and dimensions

See figure 1 and table 1. Dimensions and tolerances are expressed in millimetres. They are applicable after any surface coating, but before the application of any lubricant.

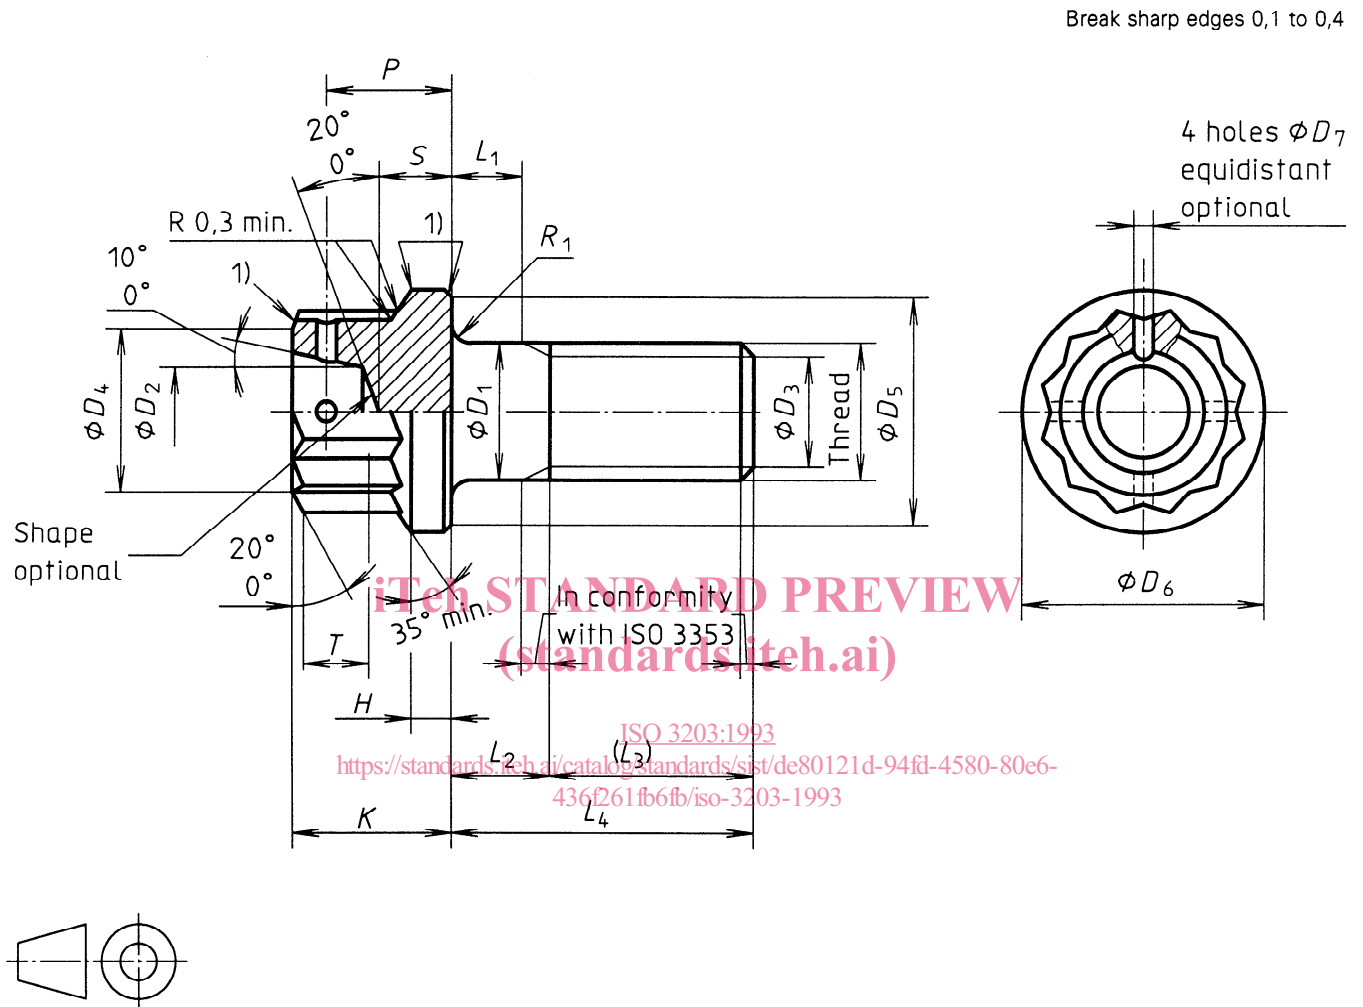

1) Rounded or chamfered in this area.

Figure 1

Table 1

Diameter code	Thread ¹⁾	D ₁				D ₂ +0,5 0	D ₃		D ₄ min.	D ₅ min.	D ₆ max.	D ₇ H13 ²⁾
		normal		pitch diameter			nom.	tol.				
		nom.	tol.	nom.	tol.							
040	MJ4×0,7 – 4h6h	4	h12 ²⁾	3,54	± 0,13	—	3	0 -0,5	5,8	7,5	8,3	1
050	MJ5×0,8 – 4h6h	5		4,48		3,2	3,4	6,8	8,3	9,1		
060	MJ6×1 – 4h6h	6		5,35		4,1	4,2	7,8	9,8	10,6	1,4	
070	MJ7×1 – 4h6h	7		6,35		4,9	5,2	8,8	11,3	12,1		
080	MJ8×1 – 4h6h	8		7,35		5,2	6,2	9,8	12,8	13,6		
100	MJ10×1,25 – 4h6h	10		9,19		6,7	7,9	11,8	15,7	16,7	1,6	
120	MJ12×1,25 – 4h6h	12		11,19		8	9,8	13,7	18,8	19,9		

Diameter code	H	K	L ₁ 3) 4) 5)	L ₂ 3) 4) 5)	L ₃	L ₄ 5)		P	R ₁		S	T	Wrenching dash number ⁶⁾
	min.	h15 ²⁾	min.	max.	nom.	tol.	nom.	tol.	nom.	tol.	+0,4 0	min.	
040	0,8	5,5	0,4	2	14	16 to 56	± 0,3	3,5	0,4	0 -0,2	—	2,5	06
050	1	6,5	0,5	4	16	20 to 70		4,5	0,5		2,5	2,8	07
060	1,2	7,5	0,7		18	22 to 84		5,2	0,7		2,8	3,5	08
070	1,4	8,2			20	24 to 98		5,9			3,3	3,8	09
080	1,6	8,6			22	26 to 112		6,3			3,7	3,9	10
100	2	10,1	0,8	6	26	32 to 140		7,7	0,8		4,7	4,2	12
120	2,4	11,4	0,9		30	36 to 168		8,8	0,9		0 -0,3	5,6	4,5

- 1) In conformity with ISO 5855-2.
- 2) See ISO 286-2.
- 3) First length, corresponding to first L₄ length.
- 4) Conditions L₁ min. and L₂ max. cannot be obtained simultaneously.
- 5) Increments:
 2 for L₄ ≤ 100
 4 for L₄ > 100
 If greater lengths are required, they shall be chosen using these increments.
- 6) In conformity with ISO 4095 over T min.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

[ISO 3203:1993](#)

<https://standards.iteh.ai/catalog/standards/sist/de80121d-94fd-4580-80e6-436f261fb6fb/iso-3203-1993>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

[ISO 3203:1993](#)

<https://standards.iteh.ai/catalog/standards/sist/de80121d-94fd-4580-80e6-436f261fb6fb/iso-3203-1993>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3203:1993

<https://standards.iteh.ai/catalog/standards/sist/de80121d-94fd-4580-80e6-436f261fb6fb/iso-3203-1993>

UDC 621.882.21:629.7

Descriptors: aircraft industry, aircraft equipment, fasteners, bolts, dimensions, dimensional tolerances.

Price based on 3 pages
