



FINAL DRAFT International Standard

ISO/FDIS 24342

Resilient and textile floor- coverings — Determination of side length, edge straightness and squareness of tiles and planks

Revêtements de sol résilients et textiles — Détermination de la longueur des bords, de la rectitude des arêtes et de l'équerrage des dalles et des lames

ISO/TC 219

Secretariat: **NBN**

Voting begins on:
2024-01-31

Voting terminates on:
2024-03-27

International Standards
standards.iteh.ai
Document Preview

[ISO/FDIS 24342](https://standards.iteh.ai/catalog/standards/iso/7ff8428-1e14-4ba2-990a-cb41f62b0fd2/iso-fdis-24342)

<https://standards.iteh.ai/catalog/standards/iso/7ff8428-1e14-4ba2-990a-cb41f62b0fd2/iso-fdis-24342>

ISO/CEN PARALLEL PROCESSING

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/FDIS 24342](https://standards.iteh.ai/catalog/standards/iso/7ff8428-1e14-4ba2-990a-cb41f62b0fd2/iso-fdis-24342)

<https://standards.iteh.ai/catalog/standards/iso/7ff8428-1e14-4ba2-990a-cb41f62b0fd2/iso-fdis-24342>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	2
5 Apparatus	2
5.1 Reference plate.....	2
5.2 Rigid metal or glass plate.....	3
5.3 Flat bedplate apparatus.....	3
5.4 Dial gauge, calliper gauge and/or thickness gauges.....	5
5.5 Movable dial gauges apparatus.....	5
6 Sampling and selection of specimens	6
7 Atmosphere for conditioning and testing	6
7.1 Resilient floor coverings.....	6
7.2 Textile floor coverings.....	7
8 Procedure	7
8.1 General.....	7
8.2 Side length.....	7
8.2.1 Gauge method.....	7
8.2.2 Movable dial gauge method.....	7
8.2.3 Sliding calliper method.....	8
8.3 Edge straightness.....	8
8.3.1 Thickness gauge method.....	8
8.3.2 Movable dial gauge method.....	8
8.4 Squareness.....	9
8.4.1 Thickness gauge method.....	9
8.4.2 Movable dial gauge method.....	9
9 Calculation and expression of the results	9
9.1 For flat bedplate apparatus (5.3) and thickness gauge (5.4).....	9
9.1.1 Side length.....	9
9.1.2 Edge Straightness.....	9
9.1.3 Squareness.....	9
9.2 For the movable dial gauge apparatus.....	9
9.2.1 Tiles.....	9
9.2.2 Plank.....	9
9.3 For the sliding calliper apparatus.....	10
10 Test report	10
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 219, *Floor coverings*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 134, *Resilient and textile floor coverings*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This fourth edition cancels and replaces the third edition (ISO 24342:2018), which has been technically revised.

The main changes are as follows:

- procedures have been modified to allow for differences between planks and tiles. Clauses 3, 4, 5, 8 and 9 have therefore been updated;
- uncertainty of measurement of the records has been changed to 0,01 mm instead of 0,02 mm.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Resilient and textile floor-coverings — Determination of side length, edge straightness and squareness of tiles and planks

1 Scope

This document specifies methods for determining side lengths, straightness of edges and squareness of square and/or rectangular resilient or textile floor tiles and planks.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

squareness

measurement of the amount the corner of the tile/plank deviates from 90°

Note 1 to entry: See [Figure 1](#).

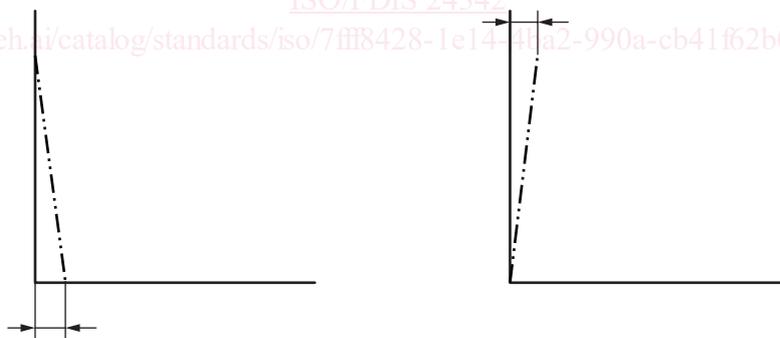


Figure 1 — Definition of squareness

3.2

straightness

property of an edge to be straight, unbent

Note 1 to entry: Some examples are shown in [Figure 2](#).

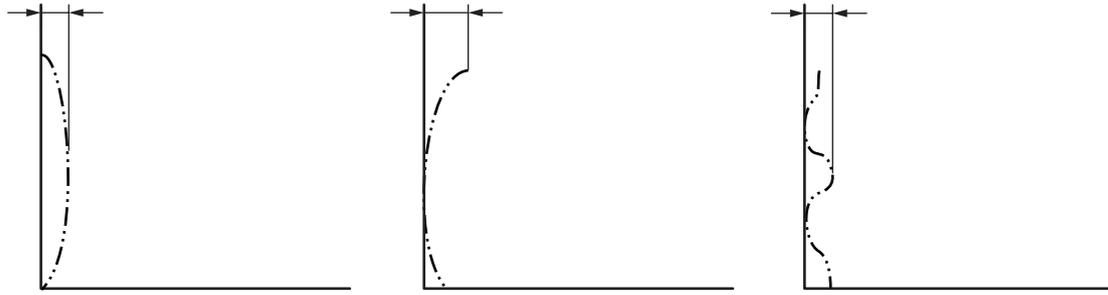


Figure 2 — Examples of straightness – S-Bow case

3.3 tile plank

type of resilient or textile flooring of predetermined shape intended to be used in a modular mode

Note 1 to entry: Tiles are usually square. Planks have a ratio length divided by width superior or equal to 1,3. A modular product with a ratio inferior to 1,3 has to be considered as a tile.

4 Principle

The side lengths, straightness and squareness of resilient or textile floor tiles and planks are important considerations because installed flooring will have an objectionable appearance if these performance criteria are not followed. This can cause the installed tiles/planks to line up unevenly, producing unsightly seams and corners that do not match. The surface dimensions of a tile/plank are measured by a contact method at defined positions in each direction.

To assess the squareness of a tile, each corner of a right-angled tile is fitted into the dihedral angle of a precision square and the maximum gap between the arm of the square and the end of the tile is measured. The maximum opening between the arm and the edge is measured at defined points along the edge to assess the straightness.

To assess the squareness of a plank, place one side of the plank against a square/rectangle and slide it up to touch the other arm. Using the thickness gauges, determine the maximum deviation from square at the small side. The procedure is repeated on the diagonally opposite corner. The maximum opening between the arm and the edge is measured at defined points along the edge to assess the straightness.

NOTE For systems with edge connection systems, the visible area of the tile/plank is considered. The devices can be modified for products with edge connection systems to ensure that only the visible area is considered.

5 Apparatus

The use of other measuring methods or devices is permitted when it can be demonstrated that we obtain the same results with the same accuracy as the devices and methods defined below.

5.1 Reference plate

Reference plate, also referred to as a “calibration plate”, made to the target dimensions of the manufactured tile/plank.

The length and width dimensions shall be within 0,01 mm of the specified dimensions of the resilient or textile tiles/planks. The reference plate shall contain at least two sides that are perpendicular to $[\pm 0,000\ 18\ \text{rad}\ (0,01^\circ)]$ one another. These are used to set the squareness gauge to zero (in the case of tile, see [Figure 3](#) as example).

One corner of the reference plate shall be truncated by 3 mm (see [Figure 3](#)) to ensure good visual contact between the sample and the arms of the flat bedplate apparatus (see [5.3](#)).