



SLOVENSKI STANDARD
SIST EN 300 948 V7.0.1:2003
01-december-2003

8 [[[HJb]`W] b]`hY`ca i b]_UW`g_]`g]ghYa `fZuU&ŽL`E`Dfctc_c``_fa]`Yb`U
g_i d]bg_Y[U_`]WJf} 77 L`f} GA `\$(`*, žfUn`]WJ+`\$`%ž]nXU`U%- , Ł

Digital cellular telecommunications system (Phase 2+) (GSM); Group Call Control (GCC) protocol (GSM 04.68 version 7.0.1 Release 1998)

iteh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **EN 300 948 Version 7.0.1**
<https://standards.iteh.ai/catalog/standards/sist/1940815f-bc92-463f-b463-432043a78be4/sist-en-300-948-v7-0-1-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST EN 300 948 V7.0.1:2003 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 948 V7.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003>

ETSI EN 300 948 V7.0.1 (2000-01)

European Standard (Telecommunications series)

**Digital cellular telecommunications system (Phase 2+);
Group Call Control (GCC) protocol
(GSM 04.68 version 7.0.1 Release 1998)**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®

GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 300 948 V7.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003>



Reference

REN/SMG-030468Q7

KeywordsDigital cellular telecommunications system,
Global System for Mobile communications (GSM)**ETSI**

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88<https://standards.gtc.fr/standards/siret/348-623-562-00017-92-463F-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003>

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable
can be downloaded from<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword	5
1 Scope	6
2 References	6
3 Definitions and abbreviations	6
3.1 Definitions	6
3.2 Abbreviations	7
4 Applicability	7
5 Main concepts	7
6 Elementary procedures for Group Call Control	8
6.1 Overview	8
6.1.1 General	8
6.1.2 Group call control states	10
6.1.2.1 Group call control states at the MS side of the interface	10
6.1.2.1.1 Attributes and parameters of GCC in the MS	10
6.1.2.1.2 NULL (U0)	10
6.1.2.1.3 MM CONNECTION PENDING (U0.p)	10
6.1.2.1.4 GROUP CALL INITIATED (U1)	10
6.1.2.1.5 GROUP CALL ACTIVE (U2)	11
6.1.2.1.6 GROUP CALL PRESENT (U3)	11
6.1.2.1.7 GROUP CALL CONNECTION REQUESTED (U4)	11
6.1.2.1.8 TERMINATION REQUESTED (U5)	11
6.1.2.1.9 Sub-states of the Group call active state	11
6.1.2.1.10 GCC Timers in the MS	12
6.1.2.1.11 Consistency of parameters and states	12
6.1.2.2 Group call control states at the network side of the interface	13
6.1.2.2.1 NULL (State N0)	13
6.1.2.2.2 GROUP CALL INITIATED (N1)	13
6.1.2.2.3 GROUP CALL ACTIVE (N2)	13
6.1.2.2.4 GROUP CALL ESTABLISHMENT PROCEEDING (N3)	13
6.1.2.2.5 TERMINATION REQUESTED (N4)	13
6.2 Procedures for establishment of a group call	13
6.2.1 Activation of a group call by the network	13
6.2.2 Mobile originated establishment	13
6.2.2.1 Termination during mobile originated establishment	14
6.2.2.2 Abnormal cases	14
6.2.3 Mobile terminating group call establishment in the MS	15
6.3 Procedures during the active state of a group call	15
6.3.1 Mobile station procedures in the active state	15
6.3.1.1 Sub-state transitions in the MS	15
6.3.2 Network procedures in the active state	16
6.4 Procedures for release, abortion, and termination of a group call	16
6.4.1 Termination procedure	16
6.4.2 Abort and release procedures	16
6.5 Miscellaneous procedures	17
6.5.1 Status procedures	17
6.5.1.1 Get status procedure	17
6.5.1.2 Set parameter procedure	17
7 Handling of unknown, unforeseen, and erroneous protocol data	17
7.1 General	17
7.2 Message too short	18
7.3 Unknown or unforeseen transaction identifier	18

7.4	Unknown or unforeseen message type.....	18
7.5	Non-semantic mandatory information element errors.....	18
7.6	Unknown and unforeseen information elements in the non-imperative message part	19
7.6.1	Information elements unknown in the message.....	19
7.6.2	Out of sequence information elements.....	19
7.6.3	Repeated Information elements.....	19
7.7	Non-imperative message part errors.....	19
7.7.1	Syntactically incorrect optional Information elements.....	19
7.8	Messages with semantically incorrect contents	19
8	Message functional definitions and contents	20
8.1	CONNECT.....	20
8.2	GET STATUS.....	21
8.2.1	mobile identity.....	21
8.3	IMMEDIATE SETUP.....	21
8.3.1	Mobile identity.....	22
8.4	SET PARAMETER.....	22
8.5	SETUP	22
8.6	STATUS.....	23
8.6.1	Call state	23
8.6.2	State attributes	23
8.7	TERMINATION	24
8.8	TERMINATION REJECT	24
8.9	TERMINATION REQUEST	24
9	Contents of information elements value parts.....	25
9.1	Protocol Discriminator.....	25
9.2	Transaction identifier.....	25
9.3	Message Type.....	25
9.4	Other information elements	26
9.4.1	Call Reference	26
9.4.2	Call state	26
9.4.3	Cause	27
9.4.4	Originator indication.....	28
9.4.6	Spare Half Octet	29
9.4.7	State attributes	29
Annex A (informative):	Change Request History	30
History		31

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG).

The present document specifies the Group Call Control (GCC) protocol used by the Voice Group Call Service (VGCS) on the radio interface within the digital cellular telecommunications system (Phase 2+).

The contents of the present document is subject to continuing work within TC-SMG and may change following formal TC-SMG approval. Should TC-SMG modify the contents of the present document, it will be resubmitted for OAP by ETSI with an identifying change of release date and an increase in version number as follows:

Version 7.x.y

- 7 Indicates GSM Phase 2+ Release 1998;
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.;
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

iTech STANDARD PREVIEW
(standards.iteh.ai)
SIST EN 300 948 V7.0.1:2003
<https://standards.iteh.ai/catalog/standards/sist/19408214-8c92-4d1f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003>

National transposition dates

Date of adoption of this EN:	31 December 1999
Date of latest announcement of this EN (doa):	31 March 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 September 2000
Date of withdrawal of any conflicting National Standard (dow):	30 September 2000

1 Scope

The present document specifies the Group Call Control (GCC) protocol used by the Voice Group Call Service (VGCS) on the radio interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1998 document, references to GSM documents are for Release 1998 versions (version 7.x.y).

- [1] GSM 01.04 (ETR 350): "Digital cellular telecommunication system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.68 (ETS 300 925): "Digital cellular telecommunication system (Phase 2+); "Voice Group Call Service (VGCS) - Stage 1".
- [3] GSM 03.03 (ETS 300 927): "Digital cellular telecommunication system (Phase 2+); Numbering, addressing and identification".
- [4] GSM 03.67 (ETS 300 932): "Digital cellular telecommunication system (Phase 2+); "enhanced Multi-Level Precedence and Pre-emption service (eMLPP) - Stage 2".
- [5] GSM 03.68 (ETS 300 933): "Digital cellular telecommunication system (Phase 2+); Voice Group Call Service (VGCS) - Stage 2".
- [6] GSM 04.06 (ETS 300 938): "Digital cellular telecommunication system; Mobile Station - Base Station System (MS - BSS) interface Data Link (DL) layer specification".
- [7] GSM 04.07 (ETS 300 939): "Digital cellular telecommunication system (Phase 2+); Mobile radio interface signalling layer 3 General aspects".
- [8] GSM 04.08 (ETS 300 940): "Digital cellular telecommunication system (Phase 2+); Mobile radio interface layer 3 specification".

3 Definitions and abbreviations

3.1 Definitions

Definitions used in the present document are also defined in GSM 02.68.

For the purposes of the present document, the following terms and definitions apply.

attachment of the user connection: See GSM 04.08, subclause 5.2.

calling user: GCC entity in the Mobile Station (MS) initiating or having initiated a group call.

clearing the context related to the group call establishment: All running GCC timers in the relevant GCC entity are stopped, all attributes in the relevant GCC entity are deleted.

downlink: Network to mobile station direction.

group call: Is used in the same sense as "voice group call".

group call channel: Combined uplink/downlink to be allocated in each cell of the group call area for a particular group call. The uplink can be used by the presently talking service subscriber only. All MSs of the listening service subscribers in one cell shall listen to the common downlink.

group receive mode: See GSM 04.08.

originating mobile station: Mobile station initiating or having initiated the group call. (Note that, in certain situations, a MS assumes to be the originating MS of a group call without actually being the originating MS of that group call. Note that there may be one or none originating MS for a given group call.)

uplink: Mobile station to network direction.

3.2 Abbreviations

Abbreviations used in the present document are also listed in GSM 01.04.

For the purposes of the present document, the following abbreviation applies:

GCC Group Call Control

iTeh STANDARD PREVIEW

4 Applicability (standards.iteh.ai)

Support of the group call protocol is optional in the MS and in the network.

<https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-432043a780c4/sist-en-300-948-v7-0-1-2003>

5 Main concepts

The present document describes the group call control (GCC) protocol, which is one of the protocols of the Connection Management (CM) sublayer (see GSM 04.07).

There is in general more than one MS engaged in a group call. Consequently, there is in general more than one MS with a GCC entity engaged in the same group call, and there is one GCC entity in the network engaged in that group call.

Under which conditions a GCC message is passed from lower (sub-)layers to the GCC entity is defined in the specifications of the sub-layers.

The MS shall ignore GCC messages that it receives which were sent in unacknowledged mode and which explicitly specify as destination a mobile identity which is not a mobile identity of the MS.

Higher layers and the MM sub-layer decide when to accept parallel GCC transactions and when/whether to accept GCC transactions in parallel to other CM transactions.

The group call may be initiated by a mobile user or by a dispatcher. Specification of a protocol for dispatchers is out of the scope of the present document. Hence, in the scope of the present document, there are:

- one GCC entity in the network; and
- one or more than one GCC entities in different MSs

engaged in a group call, and one or none of the MSs is the originator of the group call (called the originating MS in the present document). Note that, in certain situations, a MS assumes to be the originator of a group call without being the originator.

The originator of the GCC transaction chooses the Transaction Identifier (TI). A MS not assuming to be the originator of the transaction will chose the transaction identifier received from the network, setting the TI flag to $1+x \text{ mod } 2$ where x is the received TI flag.

The present document describes the group call control protocol only with regard to two peer entities, one in a MS, the other one in the network. The call control entities are described as communicating finite state machines which exchange messages across the radio interface and communicate internally with other protocol (sub)layers. In particular, the GCC protocol uses the MM and RR sublayer specified in GSM 04.08. This description is only normative as far as the consequential externally observable behaviour is concerned. For simplicity, instead of using the terms "GCC entity in the MS" and "GCC entity in the network", the present document often uses the terms "MS" and "network" if no confusion may arise.

Certain sequences of actions of the two peer entities compose "elementary procedures" which are used as a basis for the description in the present document. These elementary procedures are defined in clause 6.

The network should apply supervisory functions to verify that the GCC procedures are progressing and if not, take appropriate means to resolve the problems. This, however, is out of the scope of the present document.

6 Elementary procedures for Group Call Control

6.1 Overview

6.1.1 General

The elementary procedures may be grouped into the following classes:

- group call establishment procedures;
- group call termination procedures; [SIST EN 300 948 V7.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-492043a78be4/sist-en-300-948-v7-0-1-2003)
- call information phase procedures; <https://standards.iteh.ai/catalog/standards/sist/19408f5f-be92-463f-b4b3-492043a78be4/sist-en-300-948-v7-0-1-2003>
- miscellaneous procedures.

Figure 6.1 gives an overview of the main states and transitions on the MS side.

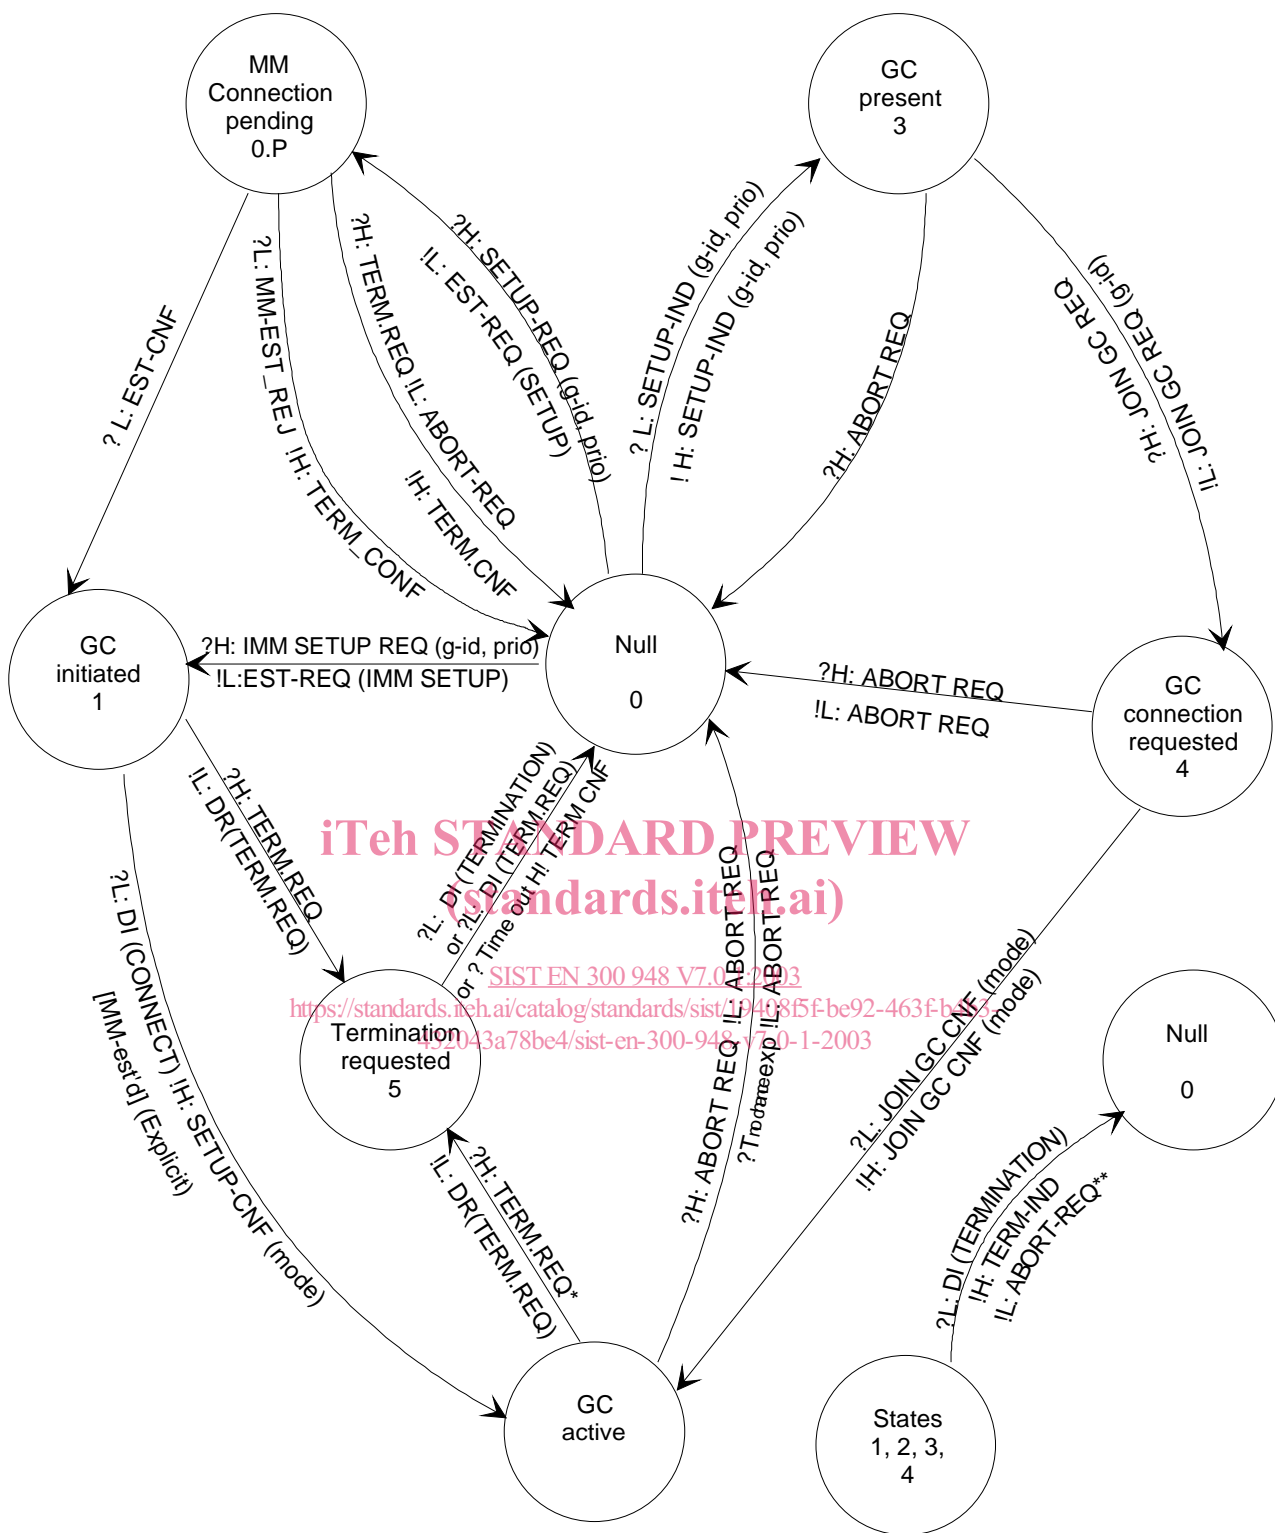


Figure 6.1: Overview group call control protocol/MS side

* if MS assumes to be the originator of the group call

** if not in RR connected mode

6.1.2 Group call control states

6.1.2.1 Group call control states at the MS side of the interface

The GCC entity of the MS is described as an extended finite state machine. It performs transitions between (main) states, and in main state GROUP CALL ACTIVE (U3) it performs transitions between sub-states. It has certain parameters and attributes, e.g. configuration parameters and behaviour parameters, which it sets and changes based on interaction with higher and lower (sub-)layers and on message exchange with its peer entity. If a configuration parameter is set to a certain value, the MS shall also adapt the configuration accordingly. Behaviour parameters decide on (part of) the behaviour of the GCC entity. When the GCC entity in the MS receives a message, it shall first analyse whether it shall ignore the message, see clauses 5 and 7.

6.1.2.1.1 Attributes and parameters of GCC in the MS

For the following behaviour parameters, the description is informative.

Parameter	Description
ORIG	Depending on the context, the MS assumes to be the originator of the call (ORIG = T) or not to be the originator of the call (ORIG = F).
COMM	Depending on the context, the MS assumes that communication with its peer entity is enabled in both directions (COMM = T) or not (COMM = F).

For the following configuration parameters the MS shall adapt its configuration according to the parameter value and parameter definition.

Parameter	Definition
D-ATT	D-ATT = T means that the MS attaches the user connection for the group call in the downlink. D-ATT = F means that the MS does not attach the user connection for the group call in the downlink.
U-ATT	U-ATT = T means that the MS attaches the user connection for the group call in the uplink. U-ATT = F means that the MS does not attach the user connection for the group call in the uplink.

6.1.2.1.2

NULL (U0)

<https://standards.iteh.ai/catalog/standards/sist/194085f5f-be92-463f-b4b3-432043a78be4/sist-en-300-948-v7-0-1-2003>

No group call exists for the GCC entity. When entering the state, parameters shall be set to the following values, and configuration shall be adapted to the new values of configuration parameters: ORIG = F, COMM = F, D-ATT = F, U-ATT = F.

6.1.2.1.3

MM CONNECTION PENDING (U0.p)

The GCC entity has requested the explicit establishment of an MM connection. When entering the state, parameters shall be set to the following values, and configuration shall be adapted to the new values of configuration parameters: ORIG = T, COMM = F, D-ATT = F, U-ATT = F.

6.1.2.1.4

GROUP CALL INITIATED (U1)

The GCC entity has requested the peer entity in the network to establish a group call. When entering the state, parameters shall be set to the following values, and configuration shall be adapted to the new values of configuration parameters: ORIG = T, COMM = T, D-ATT = F, U-ATT = F.